





Features

- 105° opening angle
- One piece assembly
- Wraparound or edge mount
- 7/16" cup depth
- +/- 1/8" height adjustment
- +/- 1/16" side adjustment
- +3/32", -1/32" cam depth adjustment
- Can be used with BLUMOTION 971A9700
- Steel, nickel-plated


Minimum reveal

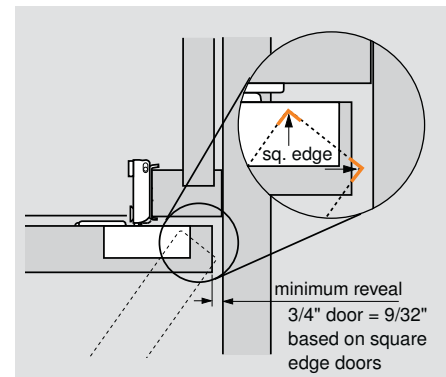


Boring pattern

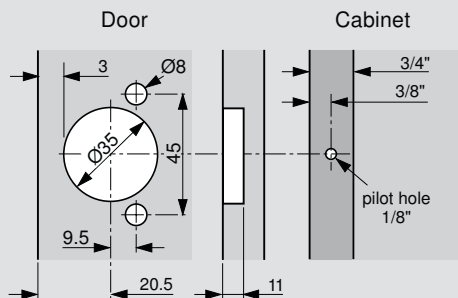


Dimensions

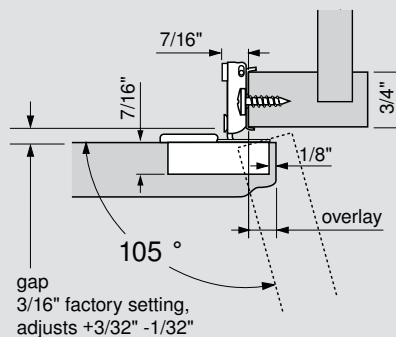

Adjustment

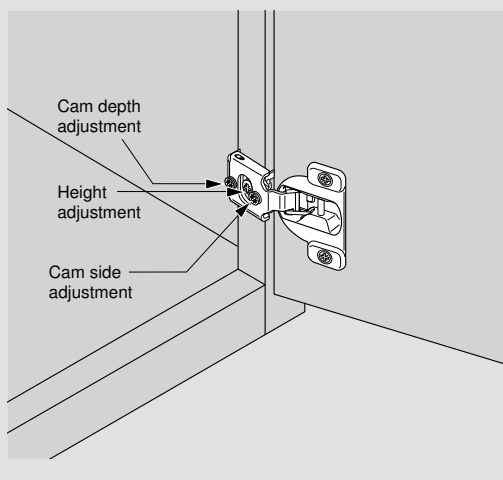

Wraparound hinges



Overlay	Screw-on	47 Press-in
3/8"	38N355C.06	38N358C.06
1/2"	38N355C.08	38N358C.08
5/8"	38N355C.10	38N358C.10
3/4"	38N355C.12	38N358C.12

Edge mount hinges



Overlay	Screw-on	47 Press-in
1/2"	38N355CE08	38N358CE08

Calculating door protrusion

Door overlay	Door protrusion
3/8"	1/4"
1/2"	1/8"
5/8"	0
3/4"	0

Installation screw

Truss head installation screw	834TH
-------------------------------	-------