




**TIOMOS HINGES**



**G\*GRASS®**

## **TIOMOS HINGE SYSTEM**

Integrated Soft-close, stylish design, maximum stability.  
The best possible hinge solution for cabinet doors.

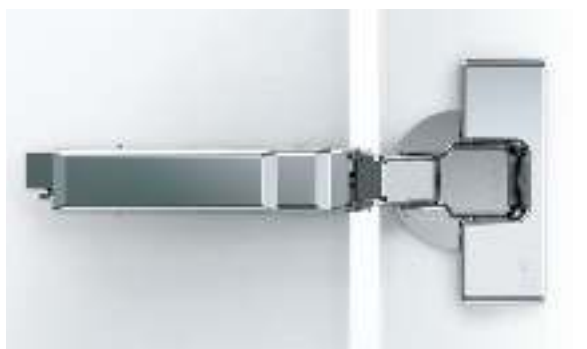





Tiomos, an elegant hinge system today that meets the technical and functional requirements of tomorrow.



**Our developers set out to create a product innovation – a completely new hinge system. The result is Tiomos.** Not only does Tiomos outperform any other hinge in the industry, it offers a timeless design as well as its own individual character.

Tiomos is a completely new hinge concept. The product range covers virtually every application, from standard doors to wide angle doors, from frameless applications to face frame applications. The Tiomos offers two closing actions: the standard Self-close and the popular Soft-close. The Soft-close offers a three tier adjustable mechanism, which is fully

integrated and concealed in the hinge arm. The closing process is extremely smooth from the degree that the Soft-close is activated until the door is completely shut. With the superb engineering and design, size and weight of the door will not be a factor. The cabinet doors pull open with ease and minimal gaps can be achieved with the new design of the hinge.

Tiomos – the ideal solution to the ever increasing requirements of today's manufacturers.



Tiomos - One hinge system to cover all applications.

**Tiomos is not a revamp of an existing hinge system but an evolutionary new development.**

Tiomos provides perfect movement for essentially every application, from standard doors to wide angle doors, from diagonal corner hinges to pie-cut corner hinges, and from frameless applications to face frame applications. Tiomos is available in a 45mm or 42mm boring pattern for dowelled hinges and 45mm for screw-on hinges. The Tiomos Impresso, the ever popular tool free version, is available in a combined 42/45mm pattern.





## TIOMOS HINGE SYSTEM

One hinge system featuring a multitude of innovative aspects.



### **Soft-close technology is concealed within the hinge arm.**

Three levels of closing pressure are available with the Tiomos adjustable Soft-close mechanism, which is fully integrated and concealed in the hinge arm. The hinges arrive with the adjustment lever in the horizontal position. A turn to the left or the right will adjust the Soft-close mechanism to your individual requirements.



### **Perfect alignment with a twist of the hand.**

For fine adjustment, the Tiomos hinge system offers three dimensional adjustment. Depth adjustment (+3/-2mm) is based on the worm gear principle and is continuous and self-locking. Depending on the type of base plate chosen, height adjustment ( $\pm 2\text{mm}$ ) can be achieved via a worm gear or through elongated holes ( $\pm 2.5\text{mm}$ ). Side adjustment ( $\pm 2\text{mm}$ ) is on the hinge arm.



### **The new kinematics inside Tiomos.**

The complex inner workings of this high-tech hinge are hidden from view, but they are most impressive when working as one. With the new kinematics in place the doors are extremely easy to open. This mechanism makes alignment with the smallest of gaps and reveals possible opening up new possibilities to cabinet designers.



For stronger damping action, turn the adjustment lever by 90° to the right.




















































Tiomos hinges leave the factory with the adjustment lever in the horizontal position.



For a gentler closing action, the adjustment lever of the Soft-close damper is turned to the left by 90°.

## Table of Content

Opening angle		Description	Full overlay	Overlay	Half overlay	Inset	Page
		<b>Technical Information</b>					8-15
110°		<b>Tiomos 110</b> • Optimal reveals up to 24 mm door thickness • Convenient depth adjustment via worm gear					16
120°		<b>Tiomos 120</b> • Optimal reveals up to 24 mm door thickness • Convenient depth adjustment via worm gear					18
160°		<b>Tiomos 160</b> • Optimal reveals up to 32 mm door thickness • Zero protrusion • For cabinets with inset drawers or pull-out shelves					20
95°		<b>Tiomos 95</b> • Optimal reveals up to 36 mm door thickness • Convenient depth adjustment via worm gear					22
110°		<b>Tiomos 110/90A</b> • Hinge for blind corner cabinets, overlay • Convenient depth adjustment via worm gear					24
110°		<b>Tiomos 110/90E</b> • Hinge for blind corner cabinets, inset • Convenient depth adjustment via worm gear					26
110°		<b>Tiomos 110/30A</b> • For 30° angled cabinets, overlay • Convenient depth adjustment via worm gear					28
110°		<b>Tiomos 110/30E</b> • For 30° angled cabinets, inset • Convenient depth adjustment via worm gear					30
110°		<b>Tiomos 110/37A</b> • For 37° angled cabinets, overlay • Convenient depth adjustment via worm gear					32
110°		<b>Tiomos 110/37E</b> • For 37° angled cabinets, inset • Convenient depth adjustment via worm gear					34
110°		<b>Tiomos 110/45A</b> • For 45° angled cabinets, overlay • Convenient depth adjustment via worm gear					36
110°		<b>Tiomos 110/45E</b> • For 45° angled cabinets, inset • Convenient depth adjustment via worm gear			<b>Corner Angle</b> 		38

Opening angle		Description	Full overlay	Overlay	Half overlay	Inset	Page
120°		<b>Tiomos 120/-15A</b> • For -15° angled cabinets, overlay • Convenient depth adjustment via worm gear					40
120°		<b>Tiomos 120/-30A</b> • For -30° angled cabinets, overlay • Convenient depth adjustment via worm gear					42
120°		<b>Tiomos 120/-45A</b> • For -45° angled cabinets, overlay • Convenient depth adjustment via worm gear					44
110°		<b>Tiomos PCC</b> • For pie cut corner application • Convenient depth adjustment via worm gear					46
	<b>Tiomos base plates</b> • Wing base plates • Straight base plates • Face frame base plates						48
	<b>Tipmatic</b> • For use with free swing hinges • For handle-free wooden doors						52
	<b>Accessories</b> • Cover caps • Angle reduction clips • Clip protection						54
	<b>Machinery</b>						56
	<b>Assembly Hardware</b> • Shelf supports • Bumper pads						58



## Introducing the Tiomos Hinge Calculator!

The Tiomos GPS takes the guess work out of choosing hinges

- Provides Item numbers
- Adjustment instructions
- Immediate access to Tiomos catalog

See Page 59 for more info

# Technical Information

## For Tiomos

### Features



- Adjustable soft-close mechanism integrated and concealed in the hinge arm
- Continuous, smooth closing action from the degree that the Soft-close is activated until the door is completely closed
- Uniform closing action regardless of the door size, weight, or materials
- Soft-close mechanism can be adjusted easily and without tools, even after doors are installed
- Each Tiomos hinge has 3 settings for closing performance
- Wide selection of hinges and specialty hinges cover all application needs
- Increased applications:
  - \* Full overlay from 24 - 13.5mm
  - \* Overlay from 19 - 11.5mm
  - \* Half Overlay from 12.5 - 5mm
  - \* Inset

#### • Depth adjustment (+3/-2mm)

is smooth and self-locking via worm screw principle

#### • Integrated damper adjustment

with 3 Soft-close settings.  
Adjustment system is concealed in the hinge arm.

#### • Ergonomic clip


release with audible locking

#### • Easy height adjustment ( $\pm 2$ mm)

via hinge arm on baseplate

#### • Side adjustment ( $\pm 2$ mm)

with overturn stop

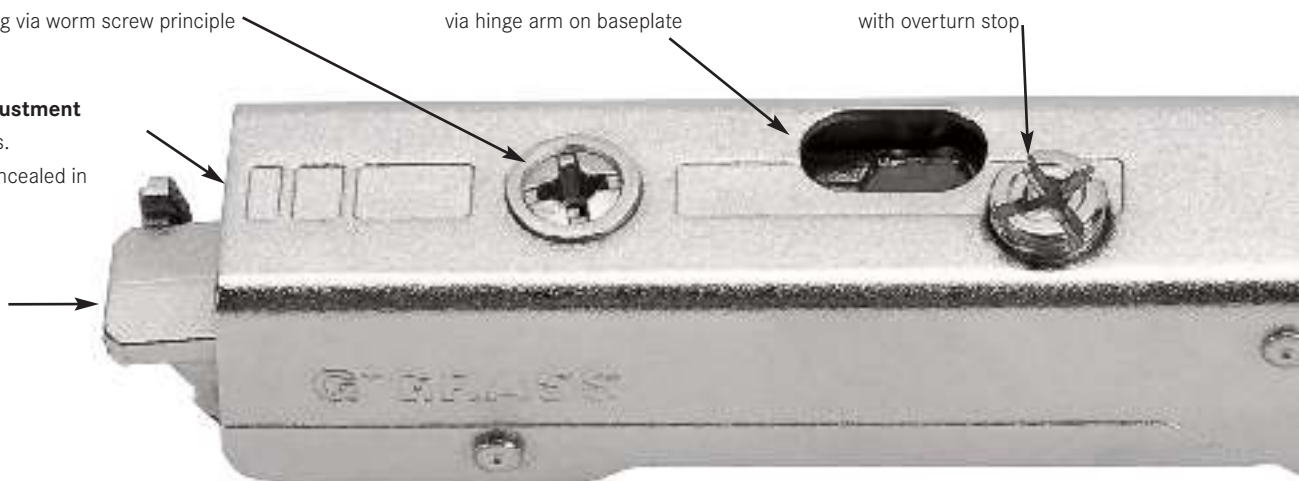

#### 3 Soft-close settings

adjust to meet your individual Soft-close requirements.



#### Height adjustment

is based on the worm gear principle that is continuous and self-locking.




## Features & Benefits

- One hinge type for all door thicknesses 14 - 24mm
- 3-dimensional adjustment with suitable base plate
  - \* Depth adjustment +3/-2mm via self-locking worm screw
  - \* Height adjustment +/-2mm on base plate via hinge arm
  - \* Side adjustment with overturn stop +/-2 via hinge arm
- Soft-close or Self-close hinges are available
- For face frame or frameless cabinets
- Impresso for tool free application
- 42mm and 45mm boring patterns



**Dowelled and Screw-on**  
cup attachments. Dowelled  
available in both 42mm and  
45mm patterns. Screw-on  
available in 45mm pattern.

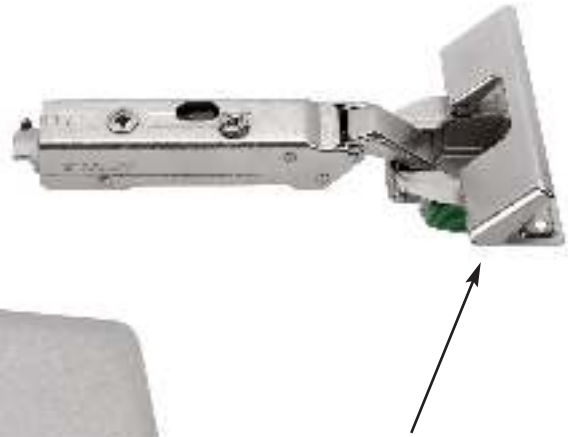

• **Impresso Hinges**  
for tool free application

• **New Kinematic**  
reduces opening force and minimizes reveals




• **Cup depth**  
12.6mm (1/2")

• **Tiomos Styles**  
42mm pattern, Dowelled  
45mm pattern, Screw-on and Dowelled  
Impresso 42/45mm pattern

# Technical Information

## For Tiomos

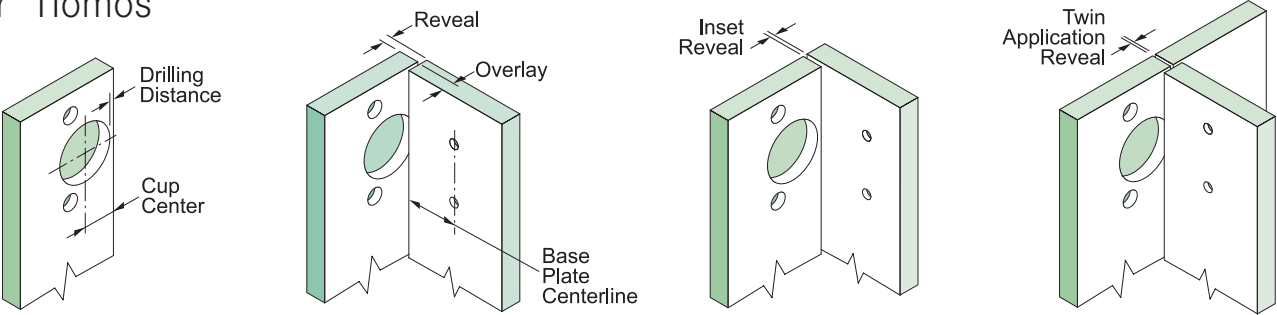

### Number of hinges per door

The number of hinges is determined by the door height, door weight, quality of the material and the fixing of the cup and base plate.

The load and height data refer to 24" standard door widths.

The table refers to hinges with and without integrated dampers. Grass strongly recommends a trial mount for all hinges and base plates.


Attach base plates using all available screw holes.

Example:

For doors measuring 56" x 24" and weighing 19 lbs., Grass recommends the installation of 3 hinges.


Note: The distance between the top and bottom hinge must be greater than the width of the door.

The **Tiomos** hinge meets and exceeds the minimum requirements of ANSI/BHMA A156.9 Standard.

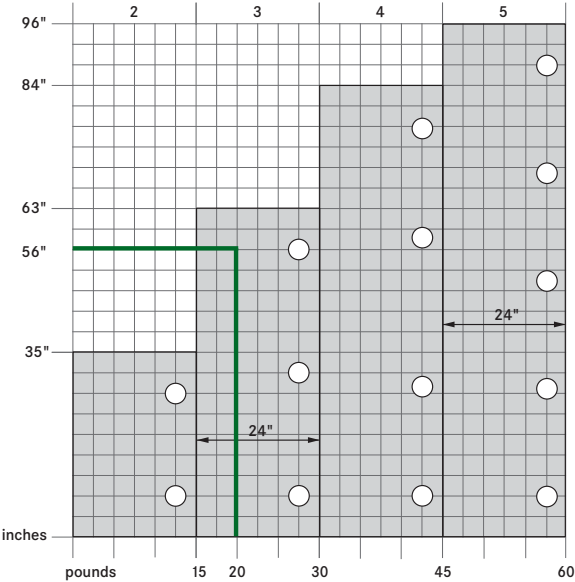

### Tool-less Soft-close adjustment

Soft-closing performance can be regulated for any door size and weight with the Tiomos adjustable integrated Soft-close. Depending upon the requirement, the Soft-closing settings can be adjusted easily and without tools. With 2 hinges there are 6 Soft-close settings.

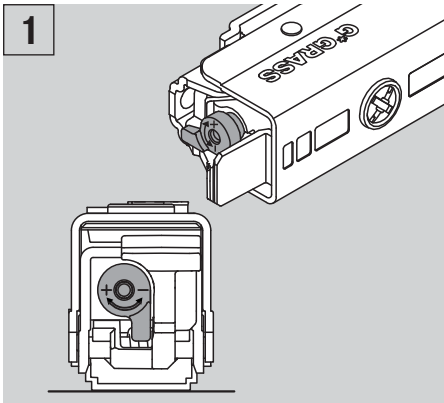


#### Light setting

Adjustment lever points toward the cabinet wall

Appropriate for:

- Small, light doors

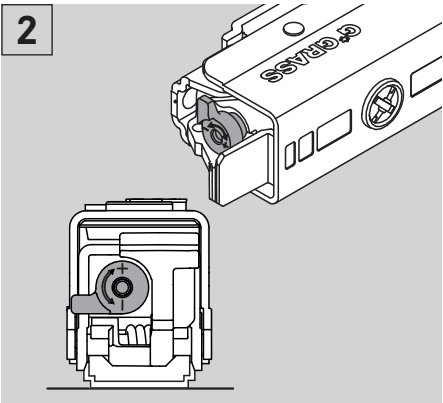


#### Medium setting (factory setting)

Adjustment lever is parallel to the cabinet wall. This setting covers 80% of door applications.

Appropriate for:

- Standard doors

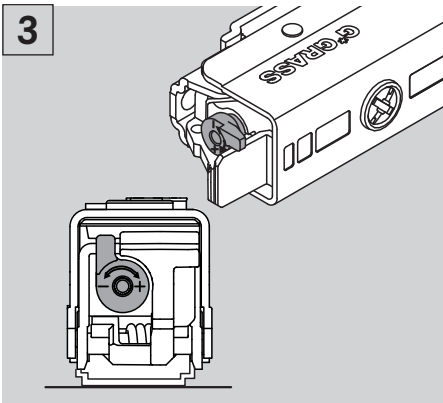

#### Strong setting

Adjustment lever points toward the cabinet interior

Appropriate for:

- Large, heavy doors


## Adjustments

The options for height adjustment depend on the type of base plate. All adjustments can be made independent of one another.


For depth adjustment, select base plates have worm gear adjustment access through the hinge arm.

Use a #2 POZI drive screw driver for hinge adjustment.


Attach base plates using all available screw holes.

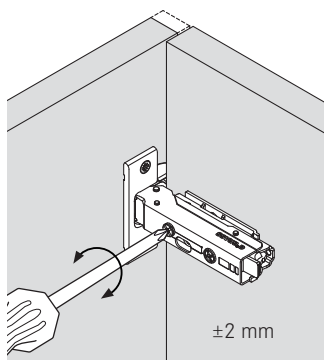

Side adjustment

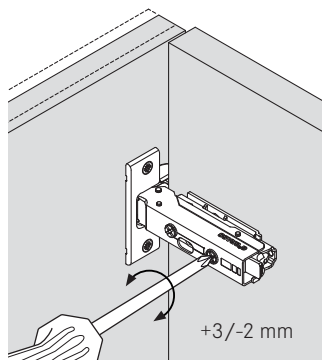

Depth adjustment via worm gear

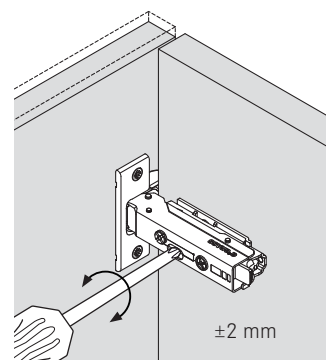

Height adjustment via base plate  $\pm 2.0\text{mm}$   
via elongated hole  $\pm 2.5\text{mm}$


## Reveal

### Full Overlay/Overlay Door


### Half Overlay Door

### Inset Door


The reveal (R) is the distance required between two doors or between the door and side wall of the cabinet to allow sufficient space for opening the door. The required reveal width (R) depends on the thickness of the door. Most cabinet makers prefer a reveal (R) of between 3mm and 6mm.



Reveal (R)



Reveal 2 x (R)



Reveal (R)

## Reveal for full overlay, overlay, and half overlay doors

The table shows the reveal necessary between two doors or between door and side wall to allow enough space for opening the door.

### Example:

For a door thickness of 19mm and a drilling distance (DD) of 6mm a (R) reveal of 0.9 is needed.

		Drilling Distance (DD)								
		3	4	5	6	7				
Door Thickness	24.0	2.4	2.1	2.1	2.1	2.0				
	22.0	1.6	1.6	1.6	1.5	1.5				
	21.0	1.4	1.3	1.3	1.3	1.3				
	20.0	1.1	1.1	1.1	1.5	1.1				
	19.0	0.9	0.9	0.9	0.9	0.9				
	18.0	0.7	0.7	0.7	0.7	0.7				
	17.0	0.6	0.6	0.6	0.6	0.6				
	16.0	0.6	0.6	0.6	0.6	0.6				
										Reveal (min.) (R)

### Note:

Reveal dimensions were determined with a door edge radius of 1mm. Hinge dimensions and calculation of reveal with factory setting.

## Reveal for inset door:

The table shows the minimum reveal for an inset door, depending on the drilling distance (DD) and the base plate height (BPH).

### Example:


A drilling distance (DD) of 6mm results from using a base plate with height 03 and a reveal (R) of 1.0mm.

		Drilling Distance (DD)								
		3	4	5	6	7				
Minimum Reveal (R)	0.0		0		2	3				
	0.5					3.5				
	1.0	0		2	3					
	1.5				3.5					
	2.0		2	3						
	3.0	2	3							
	4.0	3								
										Base Plate Height (BPH)

**IMPORTANT** To determine the correct application Grass strongly recommends a trial mounting for all hinges and base plates.

For Tiomos

**The Minimum gap** is the gap between the closed door and the front of the cabinet.




**The cup center** is the drilling distance plus  $\frac{1}{2}$  of the cup diameter.

Drilling Distance DD		Cup Center CC	
$\frac{1}{8}$ "	3	$\frac{13}{16}$ "	20.5
$\frac{5}{32}$ "	4	$\frac{27}{32}$ "	21.5
$\frac{3}{16}$ "	5	$\frac{7}{8}$ "	22.5
$\frac{1}{4}$ "	6	$\frac{15}{16}$ "	23.5
$\frac{9}{32}$ "	7	$\frac{31}{32}$ "	24.5
$\frac{5}{16}$ "	8	1"	25.5

For a door thickness (DT) of 17mm and a drilling distance (DD) of 6mm a minimum gap of 1.0mm is needed.

[illegible]


**The door overlay** is the part of the cabinet side wall or face frame that is covered by the door on the hinge side.



For a hinge with a cranking of 03, a base plate height (BPH) of 2mm, and a drilling distance (DD) of 4mm, the door overlay is 14mm.

		Drilling Distance (DD)					
		3	4	5	6	7	
Door overlay	19.0					0	
	18.0				0		
	17.0			0		2	
	16.5						
	16.0		0		2	3	
	15.5					3.5	
	15.0	0		2	3		
	14.5					3.5	
	14.0		2	3			
	13.5			3.5			
13.0	2	3					
12.5		3.5					
12.0	3						
11.5	3.5	Base Plate Height (BPH)					

**The door edge protrusion** is the amount by which the edge of the open door protrudes into the opening and varies depending on the type of hinge and method of fixing. It is stated on the respective catalog page and refers to the stated base plate for the factory setting. It can be changed by changing the height of the base plate and operation the lateral adjustment.




## Door positions

### Achieve overlay with hinge cranking

### Or Achieve overlay with base plate


#### Full Overlay (Cranking 00)

The cup overlay (factory setting) plus drilling distance determine the door overlay. Dimensions can be found in a table on the respective page of the catalog.




#### Full Overlay

Using a hinge with a cranking of 00 and a base plate height (BPH) 00




#### Overlay (Cranking 03)

The cup overlay (factory setting) plus drilling distance determine the door overlay. Dimensions can be found in a table on the respective page of the catalog.




#### Overlay

Using a hinge with a cranking of 03 and a base plate height (BPH) 03




#### Half Overlay (Cranking 9.5)

The cup overlay (factory setting) plus drilling distance determine the door overlay. Dimensions can be found in a table on the respective page of the catalog.

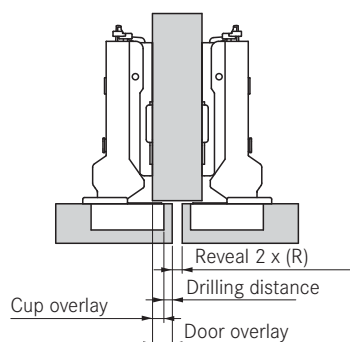


#### Half Overlay

Using a hinge with a cranking of 00 and a base plate height (BPH) 9.5




#### Inset (Cranking 19)

There is no door overlay. The reveal between the side of the cabinet and the door depends on the base plate height (BPH) and the drilling distance (DD). Dimensions can be found in a table on the respective page of the catalog.

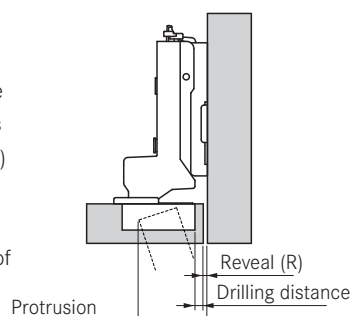

#### Inset

Using a hinge with a cranking of 03 and a base plate height 19 (BPH).







# Tiomos Impresso

## Insertion Guide



### Flap lock position

The Tiomos Impresso is a high quality performance hinge with superior strength. For the best results for cup insertion into door please follow the Guide shown below.

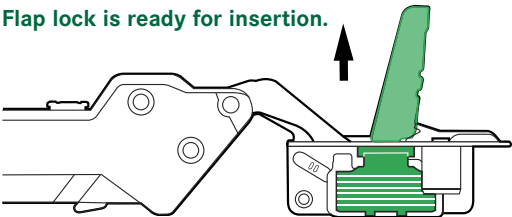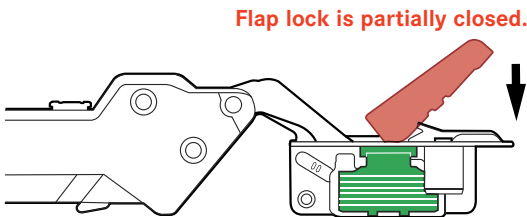

If the hinge cup flap is partially closed due to shipping and handling, lift flap to upright position before inserting into door as illustrated above.

### Expanding bracket position

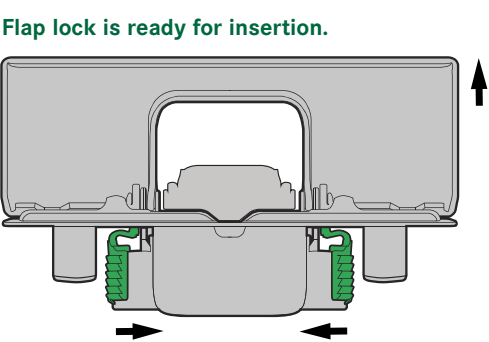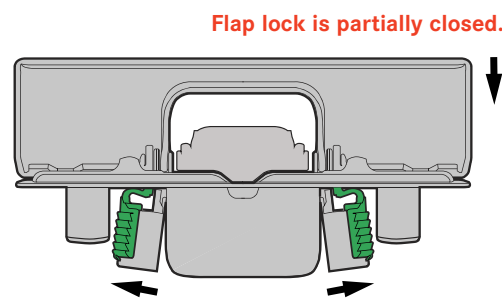


Expanding brackets are positioned incorrectly.


Expanding brackets are positioned correctly.

Please ensure that expanding green brackets are in **loose/neutral position** before inserting into door. Please reference illustration above.


### Hinge cup insertion

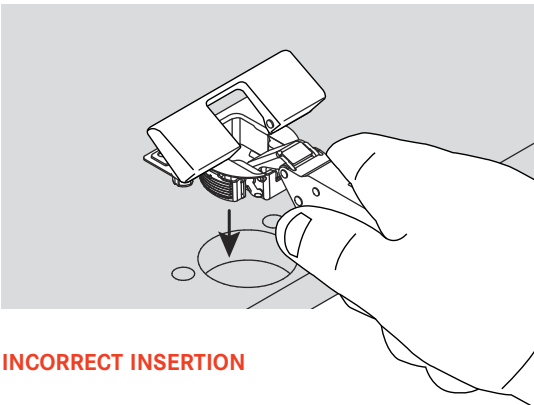

INCORRECT INSERTION

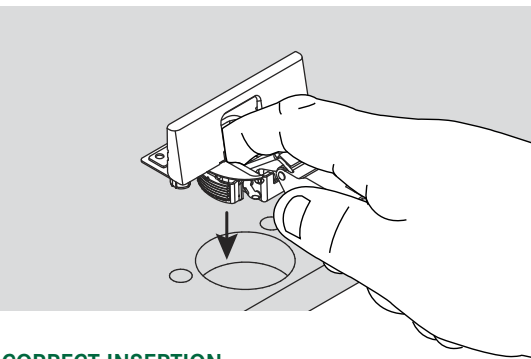

CORRECT INSERTION



**IMPORTANT:** Cup bore hole diameter must be within 35mm - 35.1mm range








For fast and easy insertion use index finger to push cup into door as illustrated above right.

# Testing Information



For Tiomos

## TEST CRITERIA FOR HINGES

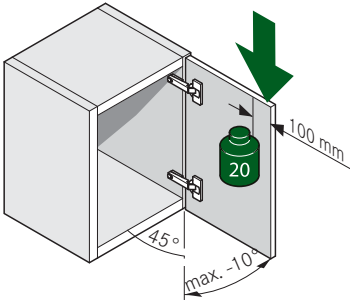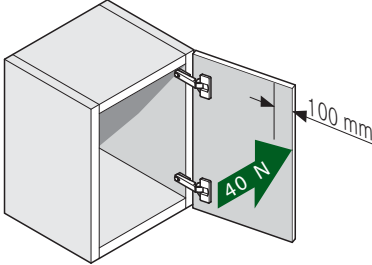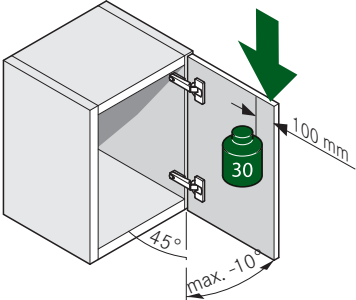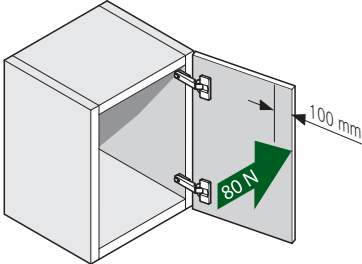
Functional test		
<p><b>Static load - vertical</b> Additional load: 44 pounds (20 kg) Opening angle: max. -10°</p> 	<p><b>Static load - horizontal</b> Force: 40 N</p> 	<p><b>Endurance test</b> Opening angle: max. -5° Open and close movements: 100,000</p> 
Overload testing		
<p><b>Vertical</b> Additional load: 66 pounds (30 kg) Opening angle: max. -10°</p> 	<p><b>Horizontal</b> Force: 80 N</p> 	<p><b>Test door</b> Weight approx. 11.5 pounds (5.2 kg)</p> 
Salt spray and humidity test		
<p>Based on DIN ISO 9227 and DIN 6270-2</p> 		

# Tiomos 110

## 110° hinge for standard doors



- 3-dimensional adjustment with suitable base plate
- Accommodates overlays up to 24mm (15/16")
- Optimal reveal up to 24 mm door thickness
- Soft-close or Self-close hinges available
- For face frame or frameless cabinets
- Convenient depth adjustment with worm gear

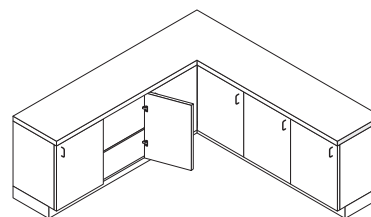

Tiomos 110 Opening Angle 110°			Impresso	Screw-on	Dowelled
-------------------------------	--	--	----------	----------	----------

Full overlay	Cranking 00	Pattern	Type	Item No.	Pattern	Type	Item No.	Item No.	PU
	Hinge cup: steel, nickel-plated Hinge arm: steel, nickel-plated	42 / 45	Soft-close	<b>F017139414228</b>	45	Soft-close	<b>F028138519228</b>	<b>F028138523228</b>	150
			Self-close	<b>F034139385228</b>		Self-close	<b>F045138457228</b>	<b>F045138461228</b>	150
		42	Soft-close	-	42	Soft-close	-	<b>F028138341228</b>	150
			Self-close	-		Self-close	-	<b>F045138279228</b>	150
Overlay	Cranking 03	Pattern	Type	Item No.	Pattern	Type	Item No.	Item No.	PU
	Hinge cup: steel, nickel-plated Hinge arm: steel, nickel-plated	42 / 45	Soft-close	<b>F017139415228</b>	45	Soft-close	<b>F028138520228</b>	<b>F028138524228</b>	150
			Self-close	<b>F034139386228</b>		Self-close	<b>F045138458228</b>	<b>F045138462228</b>	150
		42	Free-swing	<b>F035139443228</b>	42	Soft-close	-	<b>F028138342228</b>	150
			Free-swing	-		Self-close	-	<b>F045138280228</b>	150
Half overlay	Cranking 9.5	Pattern	Type	Item No.	Pattern	Type	Item No.	Item No.	PU
	Hinge cup: steel, nickel-plated Hinge arm: zinc, nickel-plated	42 / 45	Soft-close	<b>F017139416228</b>	45	Soft-close	<b>F028138521228</b>	<b>F028138525228</b>	150
			Self-close	<b>F034139387228</b>		Self-close	<b>F045138459228</b>	<b>F045138463228</b>	150
		42	Free-swing	<b>F035139444228</b>	42	Soft-close	-	<b>F028138343228</b>	150
			Free-swing	-		Self-close	-	<b>F045138281228</b>	150
Inset	Cranking 19	Pattern	Type	Item No.	Pattern	Type	Item No.	Item No.	PU
	Hinge cup: steel, nickel-plated Hinge arm: zinc, nickel-plated	42 / 45	Soft-close	<b>F017139417228</b>	45	Soft-close	<b>F028138522228</b>	<b>F028138526228</b>	150
			Self-close	<b>F034139388228</b>		Self-close	<b>F045138460228</b>	<b>F045138464228</b>	150
		42	Soft-close	-	42	Soft-close	-	<b>F028138344228</b>	150
			Self-close	-		Self-close	-	<b>F045138282228</b>	150

Cover cap	Item No.	PU
Steel, nickel-plated	<b>F072135500247</b>	1000

Opening angle reduction clip to 85°	Item No.	PU
Steel, nickel	<b>F072135751517</b>	50

Hinge cup cover cap	Item No.	PU
Steel, nickel-plated	<b>F072135503228</b>	150

Wood screw, nickel-plated	Item No.	PU
#6 x 5/8" FHP, NI	81001-43	500

PU = packaging unit

Full overlay	Overlay	Half overlay	Inset																																																																																																																																																																																																																																																																																																																																																
<p>Drawing shows Tiomos with a base plate height (BPH) 02.</p>	<p>Drawing shows Tiomos with a base plate height (BPH) 02.</p>	<p>Drawing shows Tiomos with a base plate height (BPH) 02.</p>	<p>Drawing shows Tiomos with a base plate height (BPH) 02. X = 38.5+ DT</p>																																																																																																																																																																																																																																																																																																																																																
<p>Drilling Distance (DD)</p> <table><tr><th></th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th></tr><tr><td>22.0</td><td></td><td></td><td></td><td></td><td>0</td></tr><tr><td>21.0</td><td></td><td></td><td></td><td>0</td><td></td></tr><tr><td>20.0</td><td></td><td></td><td>0</td><td>2</td><td></td></tr><tr><td>19.0</td><td></td><td>0</td><td>2</td><td>3</td><td></td></tr><tr><td>18.5</td><td></td><td></td><td></td><td>3.5</td><td></td></tr><tr><td>18.0</td><td>0</td><td></td><td>2</td><td>3</td><td></td></tr><tr><td>17.5</td><td></td><td></td><td></td><td>3.5</td><td></td></tr><tr><td>17.0</td><td></td><td>2</td><td>3</td><td></td><td></td></tr><tr><td>16.5</td><td></td><td></td><td>3.5</td><td></td><td></td></tr><tr><td>16.0</td><td>2</td><td>3</td><td></td><td></td><td></td></tr><tr><td>15.5</td><td></td><td>3.5</td><td></td><td></td><td></td></tr><tr><td>15.0</td><td>3</td><td></td><td></td><td></td><td></td></tr><tr><td>14.5</td><td>3.5</td><td></td><td></td><td></td><td></td></tr><tr><td></td><td colspan="5">Base Plate Height (BPH)</td></tr></table>		3	4	5	6	7	22.0					0	21.0				0		20.0			0	2		19.0		0	2	3		18.5				3.5		18.0	0		2	3		17.5				3.5		17.0		2	3			16.5			3.5			16.0	2	3				15.5		3.5				15.0	3					14.5	3.5						Base Plate Height (BPH)					<p>Drilling Distance (DD)</p> <table><tr><th></th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th></tr><tr><td>19.0</td><td></td><td></td><td></td><td></td><td>0</td></tr><tr><td>18.0</td><td></td><td></td><td></td><td>0</td><td></td></tr><tr><td>17.0</td><td></td><td></td><td>0</td><td>2</td><td></td></tr><tr><td>16.5</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>16.0</td><td></td><td>0</td><td></td><td>2</td><td>3</td></tr><tr><td>15.5</td><td></td><td></td><td></td><td></td><td>3.5</td></tr><tr><td>15.0</td><td>0</td><td></td><td>2</td><td>3</td><td></td></tr><tr><td>14.5</td><td></td><td></td><td></td><td>3.5</td><td></td></tr><tr><td>14.0</td><td></td><td>2</td><td>3</td><td></td><td></td></tr><tr><td>13.5</td><td></td><td></td><td>3.5</td><td></td><td></td></tr><tr><td>13.0</td><td>2</td><td>3</td><td></td><td></td><td></td></tr><tr><td>12.5</td><td></td><td>3.5</td><td></td><td></td><td></td></tr><tr><td>12.0</td><td>3</td><td></td><td></td><td></td><td></td></tr><tr><td>11.5</td><td>3.5</td><td></td><td></td><td></td><td></td></tr><tr><td></td><td colspan="5">Base Plate Height (BPH)</td></tr></table>		3	4	5	6	7	19.0					0	18.0				0		17.0			0	2		16.5						16.0		0		2	3	15.5					3.5	15.0	0		2	3		14.5				3.5		14.0		2	3			13.5			3.5			13.0	2	3				12.5		3.5				12.0	3					11.5	3.5						Base Plate Height (BPH)					<p>Drilling Distance (DD)</p> <table><tr><th></th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th></tr><tr><td>12.5</td><td></td><td></td><td></td><td></td><td>0</td></tr><tr><td>11.5</td><td></td><td></td><td></td><td>0</td><td></td></tr><tr><td>10.5</td><td></td><td></td><td>0</td><td>2</td><td></td></tr><tr><td>10.0</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9.5</td><td></td><td>0</td><td></td><td>2</td><td>3</td></tr><tr><td>9.0</td><td></td><td></td><td></td><td></td><td>3.5</td></tr><tr><td>8.5</td><td>0</td><td></td><td>2</td><td>3</td><td></td></tr><tr><td>8.0</td><td></td><td></td><td></td><td>3.5</td><td></td></tr><tr><td>7.5</td><td></td><td>2</td><td>3</td><td></td><td></td></tr><tr><td>7.0</td><td></td><td></td><td>3.5</td><td></td><td></td></tr><tr><td>6.5</td><td>2</td><td>3</td><td></td><td></td><td></td></tr><tr><td>6.0</td><td></td><td>3.5</td><td></td><td></td><td></td></tr><tr><td>5.5</td><td>3</td><td></td><td></td><td></td><td></td></tr><tr><td>5.0</td><td>3.5</td><td></td><td></td><td></td><td></td></tr><tr><td></td><td colspan="5">Base Plate Height (BPH)</td></tr></table>		3	4	5	6	7	12.5					0	11.5				0		10.5			0	2		10.0						9.5		0		2	3	9.0					3.5	8.5	0		2	3		8.0				3.5		7.5		2	3			7.0			3.5			6.5	2	3				6.0		3.5				5.5	3					5.0	3.5						Base Plate Height (BPH)					<p>Drilling Distance (DD)</p> <table><tr><th></th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th></tr><tr><td>0.0</td><td></td><td>0</td><td></td><td>2</td><td>3</td></tr><tr><td>0.5</td><td></td><td></td><td></td><td></td><td>3.5</td></tr><tr><td>1.0</td><td>0</td><td></td><td>2</td><td>3</td><td></td></tr><tr><td>1.5</td><td></td><td></td><td></td><td>3.5</td><td></td></tr><tr><td>2.0</td><td></td><td>2</td><td>3</td><td></td><td></td></tr><tr><td>3.0</td><td>2</td><td>3</td><td></td><td></td><td></td></tr><tr><td>4.0</td><td>3</td><td></td><td></td><td></td><td></td></tr><tr><td></td><td colspan="5">Base Plate Height (BPH)</td></tr></table>		3	4	5	6	7	0.0		0		2	3	0.5					3.5	1.0	0		2	3		1.5				3.5		2.0		2	3			3.0	2	3				4.0	3						Base Plate Height (BPH)				
	3	4	5	6	7																																																																																																																																																																																																																																																																																																																																														
22.0					0																																																																																																																																																																																																																																																																																																																																														
21.0				0																																																																																																																																																																																																																																																																																																																																															
20.0			0	2																																																																																																																																																																																																																																																																																																																																															
19.0		0	2	3																																																																																																																																																																																																																																																																																																																																															
18.5				3.5																																																																																																																																																																																																																																																																																																																																															
18.0	0		2	3																																																																																																																																																																																																																																																																																																																																															
17.5				3.5																																																																																																																																																																																																																																																																																																																																															
17.0		2	3																																																																																																																																																																																																																																																																																																																																																
16.5			3.5																																																																																																																																																																																																																																																																																																																																																
16.0	2	3																																																																																																																																																																																																																																																																																																																																																	
15.5		3.5																																																																																																																																																																																																																																																																																																																																																	
15.0	3																																																																																																																																																																																																																																																																																																																																																		
14.5	3.5																																																																																																																																																																																																																																																																																																																																																		
	Base Plate Height (BPH)																																																																																																																																																																																																																																																																																																																																																		
	3	4	5	6	7																																																																																																																																																																																																																																																																																																																																														
19.0					0																																																																																																																																																																																																																																																																																																																																														
18.0				0																																																																																																																																																																																																																																																																																																																																															
17.0			0	2																																																																																																																																																																																																																																																																																																																																															
16.5																																																																																																																																																																																																																																																																																																																																																			
16.0		0		2	3																																																																																																																																																																																																																																																																																																																																														
15.5					3.5																																																																																																																																																																																																																																																																																																																																														
15.0	0		2	3																																																																																																																																																																																																																																																																																																																																															
14.5				3.5																																																																																																																																																																																																																																																																																																																																															
14.0		2	3																																																																																																																																																																																																																																																																																																																																																
13.5			3.5																																																																																																																																																																																																																																																																																																																																																
13.0	2	3																																																																																																																																																																																																																																																																																																																																																	
12.5		3.5																																																																																																																																																																																																																																																																																																																																																	
12.0	3																																																																																																																																																																																																																																																																																																																																																		
11.5	3.5																																																																																																																																																																																																																																																																																																																																																		
	Base Plate Height (BPH)																																																																																																																																																																																																																																																																																																																																																		
	3	4	5	6	7																																																																																																																																																																																																																																																																																																																																														
12.5					0																																																																																																																																																																																																																																																																																																																																														
11.5				0																																																																																																																																																																																																																																																																																																																																															
10.5			0	2																																																																																																																																																																																																																																																																																																																																															
10.0																																																																																																																																																																																																																																																																																																																																																			
9.5		0		2	3																																																																																																																																																																																																																																																																																																																																														
9.0					3.5																																																																																																																																																																																																																																																																																																																																														
8.5	0		2	3																																																																																																																																																																																																																																																																																																																																															
8.0				3.5																																																																																																																																																																																																																																																																																																																																															
7.5		2	3																																																																																																																																																																																																																																																																																																																																																
7.0			3.5																																																																																																																																																																																																																																																																																																																																																
6.5	2	3																																																																																																																																																																																																																																																																																																																																																	
6.0		3.5																																																																																																																																																																																																																																																																																																																																																	
5.5	3																																																																																																																																																																																																																																																																																																																																																		
5.0	3.5																																																																																																																																																																																																																																																																																																																																																		
	Base Plate Height (BPH)																																																																																																																																																																																																																																																																																																																																																		
	3	4	5	6	7																																																																																																																																																																																																																																																																																																																																														
0.0		0		2	3																																																																																																																																																																																																																																																																																																																																														
0.5					3.5																																																																																																																																																																																																																																																																																																																																														
1.0	0		2	3																																																																																																																																																																																																																																																																																																																																															
1.5				3.5																																																																																																																																																																																																																																																																																																																																															
2.0		2	3																																																																																																																																																																																																																																																																																																																																																
3.0	2	3																																																																																																																																																																																																																																																																																																																																																	
4.0	3																																																																																																																																																																																																																																																																																																																																																		
	Base Plate Height (BPH)																																																																																																																																																																																																																																																																																																																																																		

Minimum gaps										Reveal										With 85° angle reduction clip																													
<p>The minimum gap is the gap between the closed door and the front of the cabinet.</p> <p>*only achievable with 85° angle reduction clip</p>										Drilling Distance (DD)										<p>Reveal dimensions were determined with an edge radius (of the door) of 1mm. Hinge dimensions and reveal calculation based on factory setting.</p> <p><b>IMPORTANT</b></p> <p>To determine the correct application Grass strongly recommends a trial mounting for all hinges and base plates.</p>										Drilling Distance (DD)																			
										Door Thickness (DT)																				Door Thickness (DT)										Door Thickness (DT)									
										3																				3										3									
										4																				4										4									
										5																				5										5									
										6																				6										6									
										7																				7										7									
24.0										24.0										36.0																													
22.0										22.0										30.0																													
21.0										21.0										28.0																													
20.0										20.0										26.0																													
19.0										19.0										24.0																													
18.0										18.0										22.0																													
17.0										17.0										21.0																													
16.0										16.0										20.0																													
																				19.0																													
																				18.0																													
																				16.0																													


Screw-on	Impresso and Dowelled	Cup dimensions
		<p>( ) Impresso</p>

# Tiomos 120

## 120° hinge for standard doors



- 3-dimensional adjustment with suitable base plate
- Accommodates overlays up to 24mm (15/16")
- Optimal reveal up to 24mm door thickness
- Soft-close or Self-close hinges available
- For face frame or frameless cabinets
- Convenient depth adjustment with worm gear



Tiomos 120	Opening Angle 120°	Impresso	Screw-on	Dowelled
------------	--------------------	----------	----------	----------

Full overlay	Cranking 00	Pattern	Type	Item No.	Pattern	Type	Item No.	Item No.	PU
	Hinge cup: steel, nickel-plated Hinge arm: steel, nickel-plated	42 / 45	Soft-close	<b>F017139428228</b>	45	Soft-close	<b>F028138547228</b>	<b>F028138551228</b>	150
			Self-close	<b>F034139399228</b>		Self-close	<b>F045138485228</b>	<b>F045138489228</b>	150
		42	Soft-close	-		Soft-close	-	<b>F028138369228</b>	150
			Self-close	-		Self-close	-	<b>F045138307228</b>	150
Overlay	Cranking 03	Pattern	Type	Item No.	Pattern	Type	Item No.	Item No.	PU
	Hinge cup: steel, nickel-plated Hinge arm: steel, nickel-plated	42 / 45	Soft-close	<b>F017139429228</b>	45	Soft-close	<b>F028138548228</b>	<b>F028138552228</b>	150
			Self-close	<b>F034139400228</b>		Self-close	<b>F045138486228</b>	<b>F045138490228</b>	150
		42	Soft-close	-		Soft-close	-	<b>F028138370228</b>	150
			Self-close	-		Self-close	-	<b>F045138308228</b>	150
Half overlay	Cranking 9.5	Pattern	Type	Item No.	Pattern	Type	Item No.	Item No.	PU
	Hinge cup: steel, nickel-plated Hinge arm: zinc, nickel-plated	42 / 45	Soft-close	<b>F017139430228</b>	45	Soft-close	<b>F028138549228</b>	<b>F028138553228</b>	150
			Self-close	<b>F034139401228</b>		Self-close	<b>F045138487228</b>	<b>F045138491228</b>	150
		42	Soft-close	-		Soft-close	-	<b>F028138371228</b>	150
			Self-close	-		Self-close	-	<b>F045138309228</b>	150

Cover cap	Item No.	PU
Steel, nickel-plated	<b>F072135500247</b>	150

Opening angle reduction clip to 85°	Item No.	PU
Steel, nickel	<b>F072135751517</b>	50

Hinge cup cover cap	Item No.	PU
Steel, nickel-plated	<b>F072135503228</b>	150

Wood screw, nickel-plated	Item No.	PU
#6 x 5/8" FHP, NI	81001-43	500


PU = packaging unit




Full overlay		Overlay		Half overlay																																																																																																																																																																																																																																																																																											
Drawing shows Tiomos with a base plate height (BPH) 02.		Drawing shows Tiomos with a base plate height (BPH) 02.		Drawing shows Tiomos with a base plate height (BPH) 02.																																																																																																																																																																																																																																																																																											
<b>Drilling Distance (DD)</b> <table border="1"> <tr><th></th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th></tr> <tr><td>22.0</td><td></td><td></td><td></td><td></td><td>0</td></tr> <tr><td>21.0</td><td></td><td></td><td></td><td>0</td><td></td></tr> <tr><td>20.0</td><td></td><td></td><td>0</td><td></td><td>2</td></tr> <tr><td>19.0</td><td></td><td>0</td><td></td><td>2</td><td>3</td></tr> <tr><td>18.5</td><td></td><td></td><td></td><td></td><td>3.5</td></tr> <tr><td>18.0</td><td>0</td><td></td><td>2</td><td>3</td><td></td></tr> <tr><td>17.5</td><td></td><td></td><td></td><td>3.5</td><td></td></tr> <tr><td>17.0</td><td></td><td>2</td><td>3</td><td></td><td></td></tr> <tr><td>16.5</td><td></td><td></td><td>3.5</td><td></td><td></td></tr> <tr><td>16.0</td><td>2</td><td>3</td><td></td><td></td><td></td></tr> <tr><td>15.5</td><td></td><td>3.5</td><td></td><td></td><td></td></tr> <tr><td>15.0</td><td>3</td><td></td><td></td><td></td><td></td></tr> <tr><td>14.5</td><td>3.5</td><td></td><td></td><td></td><td></td></tr> <tr><td>Base Plate Height (BPH)</td><td></td><td></td><td></td><td></td><td></td></tr> </table>			3	4	5	6	7	22.0					0	21.0				0		20.0			0		2	19.0		0		2	3	18.5					3.5	18.0	0		2	3		17.5				3.5		17.0		2	3			16.5			3.5			16.0	2	3				15.5		3.5				15.0	3					14.5	3.5					Base Plate Height (BPH)						<b>Drilling Distance (DD)</b> <table border="1"> <tr><th></th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th></tr> <tr><td>19.0</td><td></td><td></td><td></td><td></td><td>0</td></tr> <tr><td>18.0</td><td></td><td></td><td></td><td>0</td><td></td></tr> <tr><td>17.0</td><td></td><td></td><td>0</td><td></td><td>2</td></tr> <tr><td>16.5</td><td></td><td></td><td></td><td></td><td>2</td></tr> <tr><td>16.0</td><td></td><td>0</td><td></td><td>2</td><td>3</td></tr> <tr><td>15.5</td><td></td><td></td><td></td><td>3.5</td><td></td></tr> <tr><td>15.0</td><td>0</td><td></td><td>2</td><td>3</td><td></td></tr> <tr><td>14.5</td><td></td><td></td><td></td><td>3.5</td><td></td></tr> <tr><td>14.0</td><td></td><td>2</td><td>3</td><td></td><td></td></tr> <tr><td>13.5</td><td></td><td></td><td>3.5</td><td></td><td></td></tr> <tr><td>13.0</td><td>2</td><td>3</td><td></td><td></td><td></td></tr> <tr><td>12.5</td><td></td><td>3.5</td><td></td><td></td><td></td></tr> <tr><td>12.0</td><td>3</td><td></td><td></td><td></td><td></td></tr> <tr><td>11.5</td><td>3.5</td><td></td><td></td><td></td><td></td></tr> <tr><td>Base Plate Height (BPH)</td><td></td><td></td><td></td><td></td><td></td></tr> </table>			3	4	5	6	7	19.0					0	18.0				0		17.0			0		2	16.5					2	16.0		0		2	3	15.5				3.5		15.0	0		2	3		14.5				3.5		14.0		2	3			13.5			3.5			13.0	2	3				12.5		3.5				12.0	3					11.5	3.5					Base Plate Height (BPH)						<b>Drilling Distance (DD)</b> <table border="1"> <tr><th></th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th></tr> <tr><td>12.5</td><td></td><td></td><td></td><td></td><td>0</td></tr> <tr><td>11.5</td><td></td><td></td><td></td><td>0</td><td></td></tr> <tr><td>10.5</td><td></td><td></td><td>0</td><td></td><td>2</td></tr> <tr><td>10.0</td><td></td><td></td><td></td><td>2</td><td>3</td></tr> <tr><td>9.5</td><td></td><td>0</td><td></td><td></td><td>3</td></tr> <tr><td>9.0</td><td></td><td></td><td></td><td>3.5</td><td></td></tr> <tr><td>8.5</td><td>0</td><td></td><td>2</td><td>3</td><td></td></tr> <tr><td>8.0</td><td></td><td></td><td></td><td>3.5</td><td></td></tr> <tr><td>7.5</td><td></td><td>2</td><td>3</td><td></td><td></td></tr> <tr><td>7.0</td><td></td><td></td><td>3.5</td><td></td><td></td></tr> <tr><td>6.5</td><td>2</td><td>3</td><td></td><td></td><td></td></tr> <tr><td>6.0</td><td></td><td>3.5</td><td></td><td></td><td></td></tr> <tr><td>5.5</td><td>3</td><td></td><td></td><td></td><td></td></tr> <tr><td>5.0</td><td>3.5</td><td></td><td></td><td></td><td></td></tr> <tr><td>Base Plate Height (BPH)</td><td></td><td></td><td></td><td></td><td></td></tr> </table>			3	4	5	6	7	12.5					0	11.5				0		10.5			0		2	10.0				2	3	9.5		0			3	9.0				3.5		8.5	0		2	3		8.0				3.5		7.5		2	3			7.0			3.5			6.5	2	3				6.0		3.5				5.5	3					5.0	3.5					Base Plate Height (BPH)					
	3	4	5	6	7																																																																																																																																																																																																																																																																																										
22.0					0																																																																																																																																																																																																																																																																																										
21.0				0																																																																																																																																																																																																																																																																																											
20.0			0		2																																																																																																																																																																																																																																																																																										
19.0		0		2	3																																																																																																																																																																																																																																																																																										
18.5					3.5																																																																																																																																																																																																																																																																																										
18.0	0		2	3																																																																																																																																																																																																																																																																																											
17.5				3.5																																																																																																																																																																																																																																																																																											
17.0		2	3																																																																																																																																																																																																																																																																																												
16.5			3.5																																																																																																																																																																																																																																																																																												
16.0	2	3																																																																																																																																																																																																																																																																																													
15.5		3.5																																																																																																																																																																																																																																																																																													
15.0	3																																																																																																																																																																																																																																																																																														
14.5	3.5																																																																																																																																																																																																																																																																																														
Base Plate Height (BPH)																																																																																																																																																																																																																																																																																															
	3	4	5	6	7																																																																																																																																																																																																																																																																																										
19.0					0																																																																																																																																																																																																																																																																																										
18.0				0																																																																																																																																																																																																																																																																																											
17.0			0		2																																																																																																																																																																																																																																																																																										
16.5					2																																																																																																																																																																																																																																																																																										
16.0		0		2	3																																																																																																																																																																																																																																																																																										
15.5				3.5																																																																																																																																																																																																																																																																																											
15.0	0		2	3																																																																																																																																																																																																																																																																																											
14.5				3.5																																																																																																																																																																																																																																																																																											
14.0		2	3																																																																																																																																																																																																																																																																																												
13.5			3.5																																																																																																																																																																																																																																																																																												
13.0	2	3																																																																																																																																																																																																																																																																																													
12.5		3.5																																																																																																																																																																																																																																																																																													
12.0	3																																																																																																																																																																																																																																																																																														
11.5	3.5																																																																																																																																																																																																																																																																																														
Base Plate Height (BPH)																																																																																																																																																																																																																																																																																															
	3	4	5	6	7																																																																																																																																																																																																																																																																																										
12.5					0																																																																																																																																																																																																																																																																																										
11.5				0																																																																																																																																																																																																																																																																																											
10.5			0		2																																																																																																																																																																																																																																																																																										
10.0				2	3																																																																																																																																																																																																																																																																																										
9.5		0			3																																																																																																																																																																																																																																																																																										
9.0				3.5																																																																																																																																																																																																																																																																																											
8.5	0		2	3																																																																																																																																																																																																																																																																																											
8.0				3.5																																																																																																																																																																																																																																																																																											
7.5		2	3																																																																																																																																																																																																																																																																																												
7.0			3.5																																																																																																																																																																																																																																																																																												
6.5	2	3																																																																																																																																																																																																																																																																																													
6.0		3.5																																																																																																																																																																																																																																																																																													
5.5	3																																																																																																																																																																																																																																																																																														
5.0	3.5																																																																																																																																																																																																																																																																																														
Base Plate Height (BPH)																																																																																																																																																																																																																																																																																															
Minimum gaps		Reveal		With 85° angle reduction clip																																																																																																																																																																																																																																																																																											
The minimum gap is the gap between the closed door and the front of the cabinet.		Reveal dimensions were determined with an edge radius (of the door) of 1mm. Hinge dimensions and reveal calculation based on factory setting.																																																																																																																																																																																																																																																																																													
<b>Drilling Distance (DD)</b> <table border="1"> <tr><th></th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th></tr> <tr><td>24.0</td><td>1.2</td><td>2.1</td><td>3.0</td><td>3.9</td><td>4.7</td></tr> <tr><td>22.0</td><td>1.0</td><td>1.1</td><td>2.0</td><td>2.9</td><td>3.8</td></tr> <tr><td>21.0</td><td>1.0</td><td>1.0</td><td>1.6</td><td>2.4</td><td>3.3</td></tr> <tr><td>20.0</td><td>1.0</td><td>1.0</td><td>1.1</td><td>2.0</td><td>2.9</td></tr> <tr><td>19.0</td><td>1.0</td><td>1.0</td><td>1.0</td><td>1.5</td><td>2.4</td></tr> <tr><td>18.0</td><td>1.0</td><td>1.0</td><td>1.0</td><td>1.0</td><td>1.9</td></tr> <tr><td>17.0</td><td>1.0</td><td>1.0</td><td>1.0</td><td>1.0</td><td>1.5</td></tr> <tr><td>16.0</td><td>1.0</td><td>1.0</td><td>1.0</td><td>1.0</td><td>1.0</td></tr> <tr><td>Minimum gap</td><td></td><td></td><td></td><td></td><td></td></tr> </table>			3	4	5	6	7	24.0	1.2	2.1	3.0	3.9	4.7	22.0	1.0	1.1	2.0	2.9	3.8	21.0	1.0	1.0	1.6	2.4	3.3	20.0	1.0	1.0	1.1	2.0	2.9	19.0	1.0	1.0	1.0	1.5	2.4	18.0	1.0	1.0	1.0	1.0	1.9	17.0	1.0	1.0	1.0	1.0	1.5	16.0	1.0	1.0	1.0	1.0	1.0	Minimum gap						<b>Drilling Distance (DD)</b> <table border="1"> <tr><th></th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th></tr> <tr><td>24.0</td><td>6.4</td><td>5.4</td><td>4.4</td><td>3.4</td><td>2.4</td></tr> <tr><td>22.0</td><td>3.0</td><td>2.0</td><td>1.5</td><td>1.5</td><td>1.5</td></tr> <tr><td>21.0</td><td>1.4</td><td>1.3</td><td>1.3</td><td>1.3</td><td>1.3</td></tr> <tr><td>20.0</td><td>1.1</td><td>1.1</td><td>1.1</td><td>1.1</td><td>1.1</td></tr> <tr><td>19.0</td><td>0.9</td><td>0.9</td><td>0.9</td><td>0.9</td><td>0.9</td></tr> <tr><td>18.0</td><td>0.7</td><td>0.7</td><td>0.7</td><td>0.7</td><td>0.7</td></tr> <tr><td>17.0</td><td>1.0</td><td>1.0</td><td>1.0</td><td>1.0</td><td>1.5</td></tr> <tr><td>16.0</td><td>1.0</td><td>1.0</td><td>1.0</td><td>1.0</td><td>1.0</td></tr> <tr><td>Reveal (R)</td><td></td><td></td><td></td><td></td><td></td></tr> </table>			3	4	5	6	7	24.0	6.4	5.4	4.4	3.4	2.4	22.0	3.0	2.0	1.5	1.5	1.5	21.0	1.4	1.3	1.3	1.3	1.3	20.0	1.1	1.1	1.1	1.1	1.1	19.0	0.9	0.9	0.9	0.9	0.9	18.0	0.7	0.7	0.7	0.7	0.7	17.0	1.0	1.0	1.0	1.0	1.5	16.0	1.0	1.0	1.0	1.0	1.0	Reveal (R)						<b>Drilling Distance (DD)</b> <table border="1"> <tr><th></th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th></tr> <tr><td>36.0</td><td>11.1</td><td>10.3</td><td>9.7</td><td>9.1</td><td>8.5</td></tr> <tr><td>30.0</td><td>5.4</td><td>4.8</td><td>4.4</td><td>4.3</td><td>4.2</td></tr> <tr><td>28.0</td><td>3.7</td><td>3.6</td><td>3.5</td><td>3.4</td><td>3.3</td></tr> <tr><td>26.0</td><td>2.9</td><td>2.8</td><td>2.8</td><td>2.7</td><td>2.6</td></tr> <tr><td>24.0</td><td>2.2</td><td>2.1</td><td>2.1</td><td>2.1</td><td>2.0</td></tr> <tr><td>22.0</td><td>1.6</td><td>1.6</td><td>1.6</td><td>1.5</td><td>1.5</td></tr> <tr><td>21.0</td><td>1.4</td><td>1.3</td><td>1.3</td><td>1.3</td><td>1.3</td></tr> <tr><td>20.0</td><td>1.1</td><td>1.1</td><td>1.1</td><td>1.1</td><td>1.1</td></tr> <tr><td>19.0</td><td>0.9</td><td>0.9</td><td>0.9</td><td>0.9</td><td>0.9</td></tr> <tr><td>18.0</td><td>0.7</td><td>0.7</td><td>0.7</td><td>0.7</td><td>0.7</td></tr> <tr><td>16.0</td><td>0.6</td><td>0.6</td><td>0.6</td><td>0.6</td><td>0.6</td></tr> <tr><td>Reveal (R)</td><td></td><td></td><td></td><td></td><td></td></tr> </table>			3	4	5	6	7	36.0	11.1	10.3	9.7	9.1	8.5	30.0	5.4	4.8	4.4	4.3	4.2	28.0	3.7	3.6	3.5	3.4	3.3	26.0	2.9	2.8	2.8	2.7	2.6	24.0	2.2	2.1	2.1	2.1	2.0	22.0	1.6	1.6	1.6	1.5	1.5	21.0	1.4	1.3	1.3	1.3	1.3	20.0	1.1	1.1	1.1	1.1	1.1	19.0	0.9	0.9	0.9	0.9	0.9	18.0	0.7	0.7	0.7	0.7	0.7	16.0	0.6	0.6	0.6	0.6	0.6	Reveal (R)																																																																																									
	3	4	5	6	7																																																																																																																																																																																																																																																																																										
24.0	1.2	2.1	3.0	3.9	4.7																																																																																																																																																																																																																																																																																										
22.0	1.0	1.1	2.0	2.9	3.8																																																																																																																																																																																																																																																																																										
21.0	1.0	1.0	1.6	2.4	3.3																																																																																																																																																																																																																																																																																										
20.0	1.0	1.0	1.1	2.0	2.9																																																																																																																																																																																																																																																																																										
19.0	1.0	1.0	1.0	1.5	2.4																																																																																																																																																																																																																																																																																										
18.0	1.0	1.0	1.0	1.0	1.9																																																																																																																																																																																																																																																																																										
17.0	1.0	1.0	1.0	1.0	1.5																																																																																																																																																																																																																																																																																										
16.0	1.0	1.0	1.0	1.0	1.0																																																																																																																																																																																																																																																																																										
Minimum gap																																																																																																																																																																																																																																																																																															
	3	4	5	6	7																																																																																																																																																																																																																																																																																										
24.0	6.4	5.4	4.4	3.4	2.4																																																																																																																																																																																																																																																																																										
22.0	3.0	2.0	1.5	1.5	1.5																																																																																																																																																																																																																																																																																										
21.0	1.4	1.3	1.3	1.3	1.3																																																																																																																																																																																																																																																																																										
20.0	1.1	1.1	1.1	1.1	1.1																																																																																																																																																																																																																																																																																										
19.0	0.9	0.9	0.9	0.9	0.9																																																																																																																																																																																																																																																																																										
18.0	0.7	0.7	0.7	0.7	0.7																																																																																																																																																																																																																																																																																										
17.0	1.0	1.0	1.0	1.0	1.5																																																																																																																																																																																																																																																																																										
16.0	1.0	1.0	1.0	1.0	1.0																																																																																																																																																																																																																																																																																										
Reveal (R)																																																																																																																																																																																																																																																																																															
	3	4	5	6	7																																																																																																																																																																																																																																																																																										
36.0	11.1	10.3	9.7	9.1	8.5																																																																																																																																																																																																																																																																																										
30.0	5.4	4.8	4.4	4.3	4.2																																																																																																																																																																																																																																																																																										
28.0	3.7	3.6	3.5	3.4	3.3																																																																																																																																																																																																																																																																																										
26.0	2.9	2.8	2.8	2.7	2.6																																																																																																																																																																																																																																																																																										
24.0	2.2	2.1	2.1	2.1	2.0																																																																																																																																																																																																																																																																																										
22.0	1.6	1.6	1.6	1.5	1.5																																																																																																																																																																																																																																																																																										
21.0	1.4	1.3	1.3	1.3	1.3																																																																																																																																																																																																																																																																																										
20.0	1.1	1.1	1.1	1.1	1.1																																																																																																																																																																																																																																																																																										
19.0	0.9	0.9	0.9	0.9	0.9																																																																																																																																																																																																																																																																																										
18.0	0.7	0.7	0.7	0.7	0.7																																																																																																																																																																																																																																																																																										
16.0	0.6	0.6	0.6	0.6	0.6																																																																																																																																																																																																																																																																																										
Reveal (R)																																																																																																																																																																																																																																																																																															
Screw-on		Impresso and Dowelled		Cup dimensions																																																																																																																																																																																																																																																																																											

# Tiemos 160

## 160° Wide angle hinge

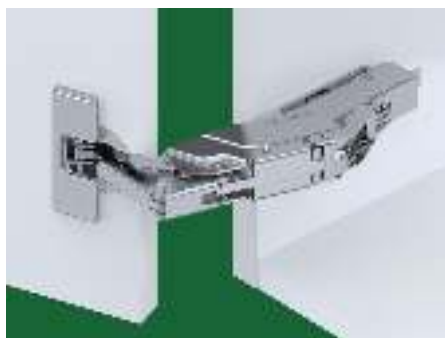

- 3-dimensional adjustment with suitable base plate
- Accommodates overlays up to 25.4 mm (1")
- Soft-close or Self-close hinges available
- For face frame or frameless cabinets
- Convenient depth adjustment with worm gear
- Zero protrusion when door is opened 90°
- 10mm cup depth
- For door thicknesses up to 32 mm (1 1/4")
- Minimal reveal




Tiemos 160	Opening Angle 160°	Impresso	Screw-on	Dowelled
------------	--------------------	----------	----------	----------

Full overlay	Cranking 00	Pattern	Type	Item No.	Pattern	Type	Item No.	Item No.	PU
	Hinge cup: steel, nickel-plated Hinge arm: steel, nickel-plated	42 / 45	Soft-close	<b>F017139435217</b>	45	Soft-close	<b>F028138561217</b>	<b>F028138564217</b>	50
			Self-close	<b>F034139406217</b>		Self-close	<b>F045138499217</b>	<b>F045138502217</b>	50
		42	Soft-close	-	42	Soft-close	-	<b>F028138382217</b>	50
			Self-close	-		Self-close	-	<b>F045138320217</b>	50
Overlay	Cranking 03	Pattern	Type	Item No.	Pattern	Type	Item No.	Item No.	PU
	Hinge cup: steel, nickel-plated Hinge arm: steel, nickel-plated	42 / 45	Soft-close	<b>F017139436217</b>	45	Soft-close	<b>F028138562217</b>	<b>F028138565217</b>	50
			Self-close	<b>F034139407217</b>		Self-close	<b>F045138500217</b>	<b>F045138503217</b>	50
		42	Soft-close	-	42	Soft-close	-	<b>F028138383217</b>	50
			Self-close	-		Self-close	-	<b>F045138321217</b>	50
Half overlay	Cranking 9.5	Pattern	Type	Item No.	Pattern	Type	Item No.	Item No.	PU
	Hinge cup: steel, nickel-plated Hinge arm: zinc, nickel-plated	42 / 45	Soft-close	<b>F017139437217</b>	45	Soft-close	<b>F028138563217</b>	<b>F028138566217</b>	50
			Self-close	<b>F034139408217</b>		Self-close	<b>F045138501217</b>	<b>F045138504217</b>	50
		42	Soft-close	-	42	Soft-close	-	<b>F028138384217</b>	50
			Self-close	-		Self-close	-	<b>F045138322217</b>	50

### Mitered corner application

Use Full overlay hinge (00 Cranking) with 19 mm base plate.


Use 120° opening angle reduction clip. Prevents doors from bumping with the cabinet side in inset applications and mitered corner applications.

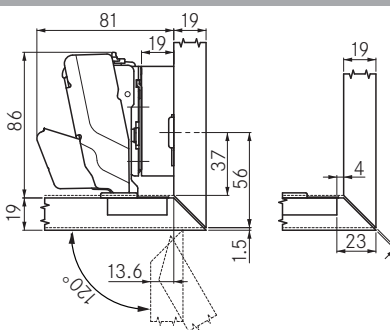


### 3/8" Lip door application

Use Full overlay hinge (00 Cranking) with 21 mm base plate.

Use 120° opening angle reduction clip. Prevents doors from bumping with the cabinet side in inset applications and mitered corner applications.




### Zero door protrusion at 90°



Zero protrusion for application with inset drawers. With 00 cranking and 00 height of base plate the door is flush with the cabinet at 90°.

### Hinge cup cover cap



Steel, nickel-plated

Item No.	PU
<b>F072135503228</b>	150

### Angle reduction clip to 120°



Plastic, black

Item No.	PU
<b>F072135753117</b>	50

PU = packaging unit

Full overlay									
<b>Drilling Distance (DD)</b>									
	3	4	5	6	7	8	9	10	
25.0									0
24.0								0	
23.0						0			2
22.0					0		2	3	
21.0			0		2	3			
20.0		0	2	3					
19.0	0	2	3						
18.5				3.5					
18.0	0	2	3						
17.5				3.5					
17.0	2	3							
16.5			3.5						
16.0	2	3							
15.5	3.5								
15.0	3								
14.5	3.5								
Base Plate Height (BPH)									

Overlay									
<b>Drilling Distance (DD)</b>									
	3	4	5	6	7	8	9	10	
22.0									0
21.0								0	
20.0						0			2
19.0					0		2	3	
18.0				0	2	3			
17.0			0	2	3				
16.5						3.5			
16.0	0	2	3						
15.5					3.5				
15.0	0	2	3						
14.5				3.5					
14.0	2	3							
13.5			3.5						
13.0	2	3							
12.5	3.5								
12.0	3								
11.5	3.5								
Base Plate Height (BPH)									

Half overlay									
<b>Drilling Distance (DD)</b>									
	3	4	5	6	7	8	9	10	
15.5									0
14.5								0	
13.5						0			2
12.5					0		2	3	
11.5			0	2	3				
10.5		0	2	3					
10.0					3.5				
9.5	0	2	3						
9.0				3.5					
8.5	0	2	3						
8.0			3.5						
7.5	2	3							
7.0			3.5						
6.5	2	3							
6.0	3.5								
5.5	3								
5.0	3.5								
Base Plate Height (BPH)									

Inset									
<b>Drilling Distance (DD)</b>									
	3	4	5	6	7				
0.0						19			
0.5									
1.0					19				
1.5									
2.0				19					
3.0		19							
4.0									
Base Plate Height (BPH)									

Minimum gaps										Reveal												
The minimum gap is the gap between the closed door and the front of the cabinet.             *only achievable with 120° angle reduction clip	Door Thickness (DT)	Drilling Distance (DD)								Reveal dimensions were determined with an edge radius (of the door) of 1mm. Hinge dimensions and reveal calculation based on factory setting.	Door Thickness (DT)	Drilling Distance (DD)										
			3	4	5	6	7	8	9			10		3	4	5	6	7	8	9	10	
		32.0	1.0	1.0										32.0	0.2*	0.2*						
		31.0	1.0	1.0	1.0									31.0	0.2*	0.2*	0.2*	0.2*				
		30.0	1.0	1.0	1.0									30.0	0.2	0.2	0.2*	0.2*	0.2*			
		29.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0			1.0		29.0	0.2	0.2	0.2	0.2	0.2	0.2*	0.2*	
		28.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0			1.0		28.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
		26.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0			1.0		26.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
		25.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0			1.0		25.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
		24.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0			1.0	1.0	24.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
		22.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0			1.0	1.0	22.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
		21.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0			1.0	1.0	21.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
		20.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0			1.0	1.0	20.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
		18.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0			1.0	1.0	18.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
16.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	16.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
Minimum gap										Reveal (R)												


Screw-on	Impresso and Dowelled	Cup dimensions
		<p>( ) Impresso</p>

# Tiemos 95





## 95° hinge for thick doors

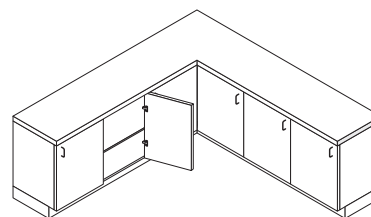

- 3-dimensional adjustment with suitable base plate
- Accommodates overlays up to 24mm (15/16")
- For door thicknesses up to 36 mm (1 7/16")
- Soft-close or Self-close hinges available
- For face frame or frameless cabinets
- Convenient depth adjustment with worm gear



Tiemos 95		Opening Angle 95°		Impresso	Screw-on	Dowelled
-----------	--	-------------------	--	----------	----------	----------

Full overlay	Cranking 00	Pattern	Type	Item No.	Pattern	Type	Item No.	Item No.	PU
	Hinge cup: steel, nickel-plated Hinge arm: steel, nickel-plated	42 / 45	Soft-close	<b>F017139438228</b>	45	Soft-close	<b>F028138567228</b>	<b>F028138571228</b>	150
			Self-close	<b>F034139409228</b>		Self-close	<b>F045138505228</b>	<b>F045138509228</b>	150
			Soft-close	-	<b>F028138389228</b>	150			
			Self-close	-	<b>F045138327228</b>	150			
Overlay	Cranking 03	Pattern	Type	Item No.	Pattern	Type	Item No.	Item No.	PU
	Hinge cup: steel, nickel-plated Hinge arm: steel, nickel-plated	42 / 45	Soft-close	<b>F017139439228</b>	45	Soft-close	<b>F028138568228</b>	<b>F028138572228</b>	150
			Self-close	<b>F034139410228</b>		Self-close	<b>F045138506228</b>	<b>F045138510228</b>	150
			Soft-close	-	<b>F028138390228</b>	150			
			Self-close	-	<b>F045138328228</b>	150			
Half overlay	Cranking 9.5	Pattern	Type	Item No.	Pattern	Type	Item No.	Item No.	PU
	Hinge cup: steel, nickel-plated Hinge arm: zinc, nickel-plated	42 / 45	Soft-close	<b>F017139440228</b>	45	Soft-close	<b>F028138569228</b>	<b>F028138573228</b>	150
			Self-close	<b>F034139411228</b>		Self-close	<b>F045138507228</b>	<b>F045138511228</b>	150
			Soft-close	-	<b>F028138391228</b>	150			
			Self-close	-	<b>F045138329228</b>	150			
Inset	Cranking 19	Pattern	Type	Item No.	Pattern	Type	Item No.	Item No.	PU
	Hinge cup: steel, nickel-plated Hinge arm: zinc, nickel-plated	42 / 45	Soft-close	<b>F017139441228</b>	45	Soft-close	<b>F028138570228</b>	<b>F028138574228</b>	150
			Self-close	<b>F034139412228</b>		Self-close	<b>F045138508228</b>	<b>F045138512228</b>	150
			Soft-close	-	<b>F028138392228</b>	150			
			Self-close	-	<b>F045138330228</b>	150			

Cover cap	Item No.	PU
Steel, nickel-plated	<b>F072135500247</b>	1000

Hinge cup cover cap	Item No.	PU
Steel, nickel-plated	<b>F072135503228</b>	150

Wood screw, nickel-plated	Item No.	PU
#6 x 5/8" FHP, NI	81001-43	500

PU = packaging unit






Tiomos 110/90A


110° blind corner hinge for overlay doors




- For blind corner construction
- 110° opening angle
- 3-dimensional adjustment with suitable base plate
- Soft-close or Self-close hinges available
- Convenient depth adjustment with worm gear

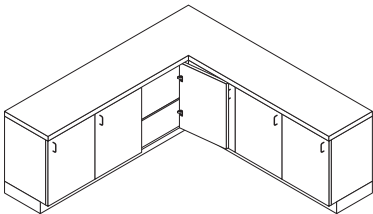

Tiomos 110/90A	Opening Angle 110°	Impresso	Screw-on	Dowelled
----------------	--------------------	----------	----------	----------

Overlay	Pattern	Type	Item No.	Pattern	Type	Item No.	Item No.	PU
 Hinge cup: steel, nickel-plated Hinge arm: zinc, nickel-plated	42 / 45	Soft-close	F017139426223	45	Soft-close	F028138535223	F028138545223	100
		Self-close	F034139397223		Self-close	F045138473223	F045138483223	100


Cover cap	Item No.	PU
 Steel, nickel-plated	F072135500247	1000

Hinge cup cover cap	Item No.	PU
 Steel, nickel-plated	F072135503228	150


Wood screw, nickel-plated	Item No.	PU
 #6 x 5/8" FHP, NI	81001-43	500

PU = packaging unit

## Overlay

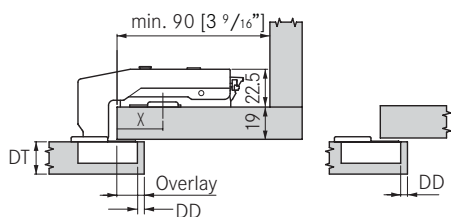


Drawing shows Tiomos with a base plate height (BPH) 00.



Cup Drilling Distance (DD)

		3	4	5	6	7
Base Plate Drilling distance (X)	30	18	19	20	21	22
	29	17	18	19	20	21
	28	16	17	18	19	20
	27	15	16	17	18	19
	26	14	15	16	17	18
Door Overlay						



Cup Drilling Distance (DD)

		Distances (in)				
		3	4	5	6	7
Base Plate Drilling distance (X)	13	18	19	20	21	22
	12	17	18	19	20	21
	11	16	17	18	19	20
	10	15	16	17	18	19
	9	14	15	16	17	18
Door Overlay						

## Minimum gaps


The minimum gap is the gap between the closed door and the front of the cabinet.

### IMPORTANT


To determine the correct application Grass strongly recommends a trial mounting for all hinges and base plates.

		Drilling Distance (DD)						
		3	4	5	6	7		
Door Thickness (DT)	24.0	1.0	1.0	1.0	1.2	2.1		
	22.0	1.0	1.0	1.0	1.0	1.5		
	21.0	1.0	1.0	1.0	1.0	1.2		
	20.0	1.0	1.0	1.0	1.0	1.0		
	19.0	1.0	1.0	1.0	1.0	1.0		
	18.0	1.0	1.0	1.0	1.0	1.0		
	17.0	1.0	1.0	1.0	1.0	1.0		
	16.0	1.0	1.0	1.0	1.0	1.0		
Minimum gap								


## Screw-on




## Dowelled



## Impresso

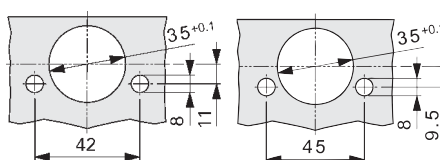

## Cup dimensions

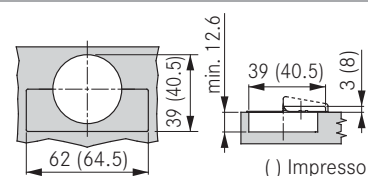


# Tiomos 110/90E


110° blind corner hinge for inset doors




- For blind corner construction
- 110° opening angle
- 3-dimensional adjustment with suitable base plate
- Soft-close or Self-close hinges available
- Convenient depth adjustment with worm gear

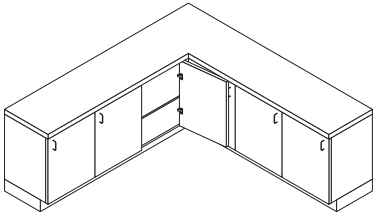

Tiomos 110/90E	Opening Angle 110°	Impresso	Screw-on	Dowelled
----------------	--------------------	----------	----------	----------

Inset	Pattern	Type	Item No.	Pattern	Type	Item No.	Item No.	PU
 Hinge cup: steel, nickel-plated Hinge arm: zinc, nickel-plated	42 / 45	Soft-close	F017139427223	45	Soft-close	F028138536223	F028138546223	100
		Self-close	F034139398223		Self-close	F045138474223	F045138484223	100


Cover cap	Item No.	PU
 Steel, nickel-plated	F072135500247	1000

Hinge cup cover cap	Item No.	PU
 Steel, nickel-plated	F072135503228	150


Wood screw, nickel-plated	Item No.	PU
 #6 x 5/8" FHP, NI	81001-43	500

PU = packaging unit


Inset

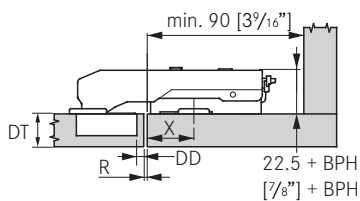

Drawing shows Tiomos with a base plate height (BPH) 03.



Base Plate Drilling distance (X)	Cup Drilling Distance (DD)				
	4	5	6	7	
	28.0	1	0		
	27.0	2	1	0	
Base Plate Drilling distance (X)	26.0	3	2	1	0
	Door reveal				



Base Plate Drilling distance (X)	Cup Drilling Distance (DD)				
	4	5	6	7	
	11.0	1	0		
	10.0	2	1	0	
Base Plate Drilling distance (X)	9.0	3	2	1	0
	Door reveal				

Reveal


Reveal dimensions were determined with an edge radius (of the door) of 1 mm. Hinge dimensions and reveal calculation based on factory setting.

**IMPORTANT**


To determine the correct application Grass strongly recommends a trial mounting for all hinges and base plates.

Door Thickness (DT)	Drilling Distance (DD)					
	3	4	5	6	7	
	24.0	2.4	2.1	2.1	2.1	2.0
	22.0	1.6	1.6	1.6	1.5	1.5
	21.0	1.4	1.3	1.3	1.3	1.3
	20.0	1.1	1.1	1.1	1.1	1.1
	19.0	0.9	0.9	0.9	0.9	0.9
	18.0	0.7	0.7	0.7	0.7	0.7
Door Thickness (DT)	17.0	0.6	0.6	0.6	0.6	0.6
	16.0	0.6	0.6	0.6	0.6	0.6
						Reveal (R)



Screw-on




Dowelled



Impresso



Cup dimensions

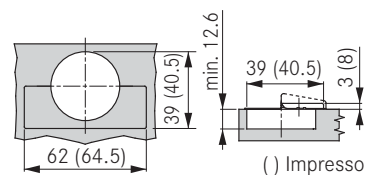


Tiomos 110/30A


+30° angle corner cabinet hinge for overlay doors




- For 30° angle corner cabinets
- 110° opening angle
- 3-dimensional adjustment with suitable base plate
- Soft-close or Self-close hinges available
- Convenient depth adjustment with worm gear



Tiomos 110/30A	Opening Angle 110°	Impresso	Screw-on	Dowelled
----------------	--------------------	----------	----------	----------

Overlay		Pattern	Type	Item No.	Pattern	Type	Item No.	Item No.	PU
	Hinge cup: steel, nickel-plated Hinge arm: zinc, nickel-plated	42 / 45	Soft-close	<b>F017139420</b> 223	45	Soft-close	<b>F028138529</b> 223	-	100
			Self-close	<b>F034139391</b> 223		Self-close	<b>F045138467</b> 223	-	100

Cover cap	Item No.	PU
 Steel, nickel-plated	F072135500247	1000

Hinge cup cover cap	Item No.	PU
 Steel, nickel-plated	F072135503228	150

Wood screw, nickel-plated	Item No.	PU
 #6 x 5/8" FHP, NI	81001-43	500

PU = packaging unit






Tiomos 110/30E


+30° angle corner cabinet hinge for inset doors





- For 30° angle corner cabinets
- 110° opening angle
- 3-dimensional adjustment with suitable base plate
- Soft-close or Self-close hinges available
- Convenient depth adjustment with worm gear



Tiomos 110/30E	Opening Angle 110°	Impresso	Screw-on	Dowelled
----------------	--------------------	----------	----------	----------

Inset		Pattern	Type	Item No.	Pattern	Type	Item No.	Item No.	PU
	Hinge cup: steel, nickel-plated Hinge arm: zinc, nickel-plated	42 / 45	Soft-close	<b>F017139421223</b>	45	Soft-close	<b>F028138530223</b>	-	100
			Self-close	<b>F034139392223</b>		Self-close	<b>F045138468223</b>	-	100


Cover cap	Item No.	PU
 Steel, nickel-plated	F072135500247	1000

Hinge cup cover cap	Item No.	PU
 Steel, nickel-plated	F072135503228	150

Wood screw, nickel-plated	Item No.	PU
 #6 x 5/8" FHP, NI	81001-43	500

PU = packaging unit

Inset

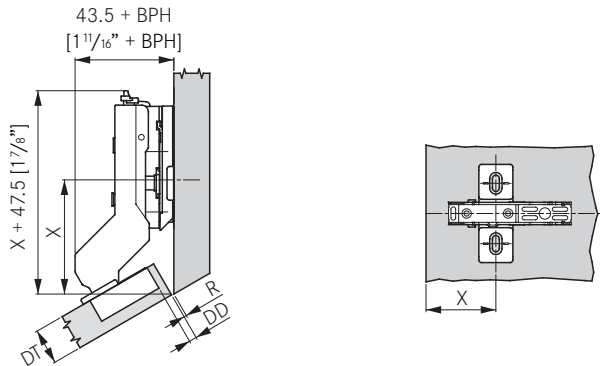

Drawing shows Tiomos with a base plate height (BPH) 9.5.

		Drilling Distance (DD)				
		3	4	5	6	7
Door thickness (DT)	22.0	9.5			12	
	21.0					
	20.0					12
	19.0			9.5		
	18.0					
	17.0				9.5	
	16.0					9.5
	15.0	6				
		Base Plate Height (BPH)				

		Drilling Distance (DD)				
		3	4	5	6	7
Door thickness (DT)	22.0	63.5			61.5	
	21.0					
	20.0					60.0
	19.0			60.0		
	18.0					
	17.0				58.0	
	16.0					56.5
	15.0	57.5				
		Wing Base Plate position (X)				


Reveal

Reveal dimensions were determined with an edge radius (of the door) of 1mm. Hinge dimensions and reveal calculation based on factory setting.


		Drilling Distance (DD)				
		3	4	5	6	7
Door Thickness (DT)	24.0	2.4	2.1	2.1	2.1	2.0
	22.0	1.6	1.6	1.6	1.5	1.5
	21.0	1.4	1.3	1.3	1.3	1.3
	20.0	1.1	1.1	1.1	1.1	1.1
	19.0	0.9	0.9	0.9	0.9	0.9
	18.0	0.7	0.7	0.7	0.7	0.7
	17.0	0.6	0.6	0.6	0.6	0.6
	16.0	0.6	0.6	0.6	0.6	0.6
	15.0	0.6	0.6	0.6	0.6	0.6
		Reveal (R)				

**IMPORTANT**  
To determine the correct application Grass strongly recommends a trial mounting for all hinges and base plates.


Screw-on



Impresso

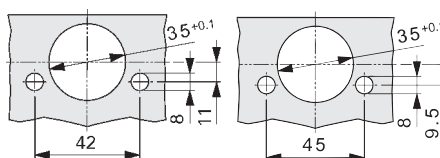

Cup dimensions

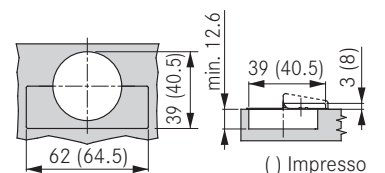


Tiomos 110/37A


+37° angle corner cabinet hinge for overlay doors





- For 37° angle corner cabinets
- 110° opening angle
- 3-dimensional adjustment with suitable base plate
- Soft-close or Self-close hinges available
- Convenient depth adjustment with worm gear



Tiomos 110/37A	Opening Angle 110°	Impresso	Screw-on	Dowelled
----------------	--------------------	----------	----------	----------

Overlay	Pattern	Type	Item No.	Pattern	Type	Item No.	Item No.	PU
 <div>Hinge cup: steel, nickel-plated Hinge arm: zinc, nickel-plated</div>	42 / 45	Soft-close	F01713942223	45	Soft-close	F028138531223	F028138541223	100
		Self-close	F034139393223		Self-close	F045138469223	F045138479223	100


Cover cap	Item No.	PU
 Steel, nickel-plated	F072135500247	1000

Hinge cup cover cap	Item No.	PU
 Steel, nickel-plated	F072135503228	150

Wood screw, nickel-plated	Item No.	PU
 #6 x 5/8" FHP, NI	81001-43	500

PU = packaging unit

## Overlay




Drawing shows Tiomos with a base plate height (BPH) 0.


### Drilling Distance (DD)

	3	4	5	6	7
21.5					0
21.0				0	
20.0			0		
19.0		0			
18.5				2	
18.0	0				3
17.5			2		
17.0				3	
16.5		2			
16.0			3		
15.5	2				
15.0		3			
14.5				6	
14.0	3				
13.0				6	
12.0			6		
11.0		6			
10.0	6				
	Base Plate Height (BPH)				


Door overlay

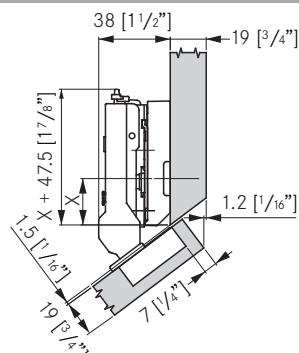

Drawing shows Tiomos with a base plate height (BPH) 12.

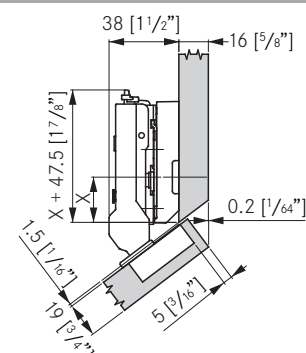


Drawing shows Tiomos with a base plate height (BPH) 12.



### Base plate height

	0	2	3	3.5	6
X	33.5	32.0	31.0	31.0	29.0

Wing base plate position (X)



### Base plate height

	0	2	3	3.5
X	16.5	15.0	14.0	14.0

Straight base plate position (X)

## Minimum gaps

The minimum gap is the gap between the closed door and the front of the cabinet.

### Drilling Distance (DD)

	3	4	5	6	7
24.0	1.0	1.0	1.0	1.2	2.1
22.0	1.0	1.0	1.0	1.0	1.5
21.0	1.0	1.0	1.0	1.0	1.2
20.0	1.0	1.0	1.0	1.0	1.0
19.0	1.0	1.0	1.0	1.0	1.0
18.0	1.0	1.0	1.0	1.0	1.0
17.0	1.0	1.0	1.0	1.0	1.0
16.0	1.0	1.0	1.0	1.0	1.0

Door Thickness (DT)

Minimum gap

## Reveal

Reveal dimensions were determined with an edge radius (of the door) of 1mm. Hinge dimensions and reveal calculation based on factory setting.

### IMPORTANT

To determine the correct application Grass strongly recommends a trial mounting for all hinges and base plates.

### Drilling Distance (DD)

	3	4	5	6	7
24.0	2.4	2.1	2.1	2.1	2.0
22.0	1.6	1.6	1.6	1.5	1.5
21.0	1.4	1.3	1.3	1.3	1.3
20.0	1.1	1.1	1.1	1.1	1.1
19.0	0.9	0.9	0.9	0.9	0.9
18.0	0.7	0.7	0.7	0.7	0.7
17.0	.06	.06	.06	.06	.06
16.0	.06	.06	.06	.06	.06

Door Thickness (DT)

Reveal (R)

Screw-on	Dowelled	Impresso	Cup dimensions


( ) Impresso

Tiomos 110/37E


+37° angle corner cabinet hinge for inset doors




- For 37° angle corner cabinets
- 110° opening angle
- 3-dimensional adjustment with suitable base plate
- Soft-close or Self-close hinges available
- Convenient depth adjustment with worm gear




Tiomos 110/37E	Opening Angle 110°	Impresso	Screw-on	Dowelled
----------------	--------------------	----------	----------	----------

Inset	Pattern	Type	Item No.	Pattern	Type	Item No.	Item No.	PU
 <div> Hinge cup: steel, nickel-plated  Hinge arm: zinc, nickel-plated </div>	42 / 45	Soft-close	F017139423223	45	Soft-close	F028138532223	-	100
		Self-close	F034139394223		Self-close	F045138470223	-	100

Cover cap	Item No.	PU
 <div> Steel, nickel-plated </div>	F072135500247	1000


Hinge cup cover cap	Item No.	PU
 <div> Steel, nickel-plated </div>	F072135503228	150

Wood screw, nickel-plated	Item No.	PU
 <div> #6 x 5/8" FHP, NI </div>	81001-43	500

PU = packaging unit



Inset

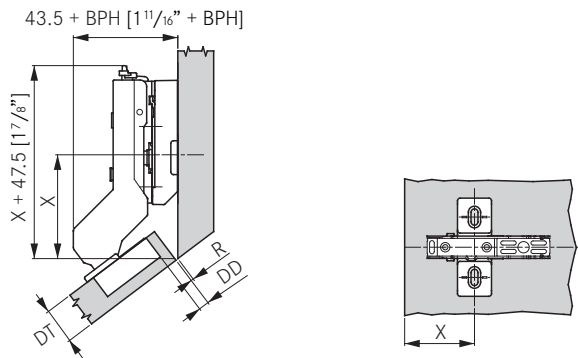

Drawing shows Tiomos with a base plate height (BPH) 12.

		Drilling Distance (DD)				
		3	4	5	6	7
Door thickness (DT)	22.0	12				
	21.0		12			
	20.0			12		
	19.0				12	
	18.0					
	17.0		9.5			12
	16.0			9.5		
	15.0					
		Base Plate Height (BPH)				

		Drilling Distance (DD)				
		3	4	5	6	7
Door thickness (DT)	22.0	59.0				
	21.0		57.5			
	20.0			56.5		
	19.0				55.0	
	18.0					
	17.0		54.5			53.0
	16.0			53.0		
	15.0					
		Wing Base Plate position (X)				

Reveal


Reveal dimensions were determined with an edge radius (of the door) of 1mm. Hinge dimensions and reveal calculation based on factory setting.

**IMPORTANT**


To determine the correct application Grass strongly recommends a trial mounting for all hinges and base plates.

		Drilling Distance (DD)				
		3	4	5	6	7
Door Thickness (DT)	22.0	1.6	1.6	1.6	1.5	1.5
	21.0	1.4	1.3	1.3	1.3	1.3
	20.0	1.1	1.1	1.1	1.1	1.1
	19.0	0.9	0.9	0.9	0.9	0.9
	18.0	0.7	0.7	0.7	0.7	0.7
	17.0	0.6	0.6	0.6	0.6	0.6
	16.0	0.6	0.6	0.6	0.6	0.6
	15.0	0.6	0.6	0.6	0.6	0.6
		Reveal (R)				


Screw-on



Impresso

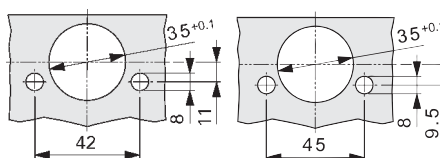

Cup dimensions

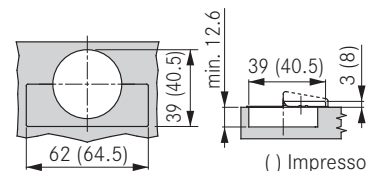


Tiomos 110/45A


+45° angle corner cabinet hinge for overlay doors





- For 45° angle corner cabinets
- 110° opening angle
- 3-dimensional adjustment with suitable base plate
- Soft-close or Self-close hinges available
- Convenient depth adjustment with worm gear



Tiomos 110/45A	Opening Angle 110°	Impresso	Screw-on	Dowelled
----------------	--------------------	----------	----------	----------

Overlay	Pattern	Type	Item No.	Pattern	Type	Item No.	Item No.	PU
 <div>Hinge cup: steel, nickel-plated Hinge arm: zinc, nickel-plated</div>	42 / 45	Soft-close	F017139424223	45	Soft-close	F028138533223	F028138543223	100
		Self-close	F034139395223		Self-close	F045138471223	F045138481223	100

Cover cap	Item No.	PU
 Steel, nickel-plated	F072135500247	1000

Hinge cup cover cap	Item No.	PU
 Steel, nickel-plated	F072135503228	150


Wood screw, nickel-plated	Item No.	PU
 #6 x 5/8" FHP, NI	81001-43	500

PU = packaging unit

## Overlay

28 + BPH

$[1\frac{1}{8}" + BPH]$




Drawing shows Tiomos with a base plate height (BPH) 0.

### Drilling Distance (DD)


	3	4	5	6	7
19.5					0
19.0					
18.5				0	
18.0					
17.5			0		
17.0					
16.5		0		2	
16.0					
15.5	0			2	
15.0					3
14.5			2	3.5	
14.0				3	
13.5		2		3.5	
13.0			3		
12.5	2		3.5		
12.0		3			
11.0	3				6
10.0				6	

Door overlay

Base Plate Height (BPH)

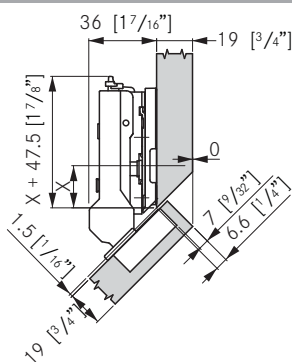


Drawing shows Tiomos with a base plate height (BPH) 9.5.




### Base plate height

	.5	0	2	3	3.5	6	9.5	12
X	30.5	28.5	27.5	27.0	24.5	21.0	18.5	

Wing base plate position (X)

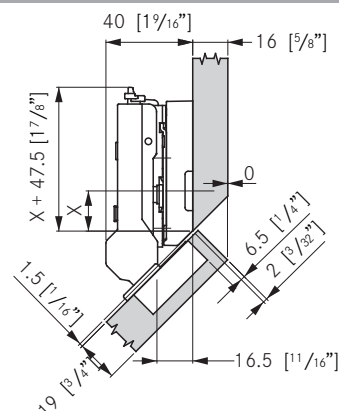

Drawing shows Tiomos with a base plate height (BPH) 12.



### Base plate height

	0	2	3	3.5
X	13.5	11.5	10.5	10.0

Straight base plate position (X)

## Minimum gaps

The minimum gap is the gap between the closed door and the front of the cabinet.

	Drilling Distance (DD)				
	3	4	5	6	7
24.0	1.0	1.0	1.0	1.2	2.1
22.0	1.0	1.0	1.0	1.0	1.5
21.0	1.0	1.0	1.0	1.0	1.2
20.0	1.0	1.0	1.0	1.0	1.0
19.0	1.0	1.0	1.0	1.0	1.0
18.0	1.0	1.0	1.0	1.0	1.0
17.0	1.0	1.0	1.0	1.0	1.0
16.0	1.0	1.0	1.0	1.0	1.0

Door Thickness (DT)

Minimum gap

## Reveal

Reveal dimensions were determined with an edge radius (of the door) of 1mm. Hinge dimensions and reveal calculation based on factory setting.

### IMPORTANT


To determine the correct application Grass strongly recommends a trial mounting for all hinges and base plates.

	Drilling Distance (DD)				
	3	4	5	6	7
24.0	2.4	2.1	2.1	2.1	2.0
22.0	1.6	1.6	1.6	1.5	1.5
21.0	1.4	1.3	1.3	1.3	1.3
20.0	1.1	1.1	1.1	1.1	1.1
19.0	0.9	0.9	0.9	0.9	0.9
18.0	0.7	0.7	0.7	0.7	0.7
17.0	.06	.06	.06	.06	.06
16.0	.06	.06	.06	.06	.06


Door Thickness (DT)

Reveal (R)


## Screw-on




## Dowelled



## Impresso

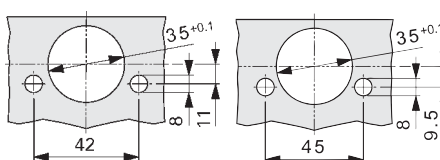

## Cup dimensions

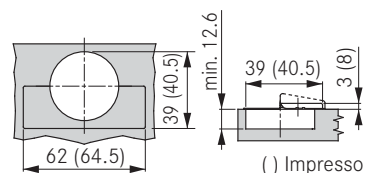


( ) Impresso

Tiomos 110/45E


+45° angle corner cabinet hinge for inset doors





- For 45° angle corner cabinets
- 110° opening angle
- 3-dimensional adjustment with suitable base plate
- Soft-close or Self-close hinges available
- Convenient depth adjustment with worm gear



Tiomos 110/45E	Opening Angle 110°	Impresso	Screw-on	Dowelled
----------------	--------------------	----------	----------	----------

Inset				Pattern	Type	Item No.					Pattern	Type	Item No.	Item No.	PU
	Hinge cup: steel, nickel-plated Hinge arm: zinc, nickel-plated	42 / 45	Soft-close	F017139425223					45	Soft-close	F028138534223	F028138544223	100		
			Self-close	F034139396223						Self-close	F045138472223	F045138482223	100		




Cover cap	Item No.	PU
 Steel, nickel-plated	F072135500247	1000

Hinge cup cover cap	Item No.	PU
 Steel, nickel-plated	F072135503228	150

Wood screw, nickel-plated	Item No.	PU
 #6 x 5/8" FHP, NI	81001-43	500

PU = packaging unit


Inset Corner Angle

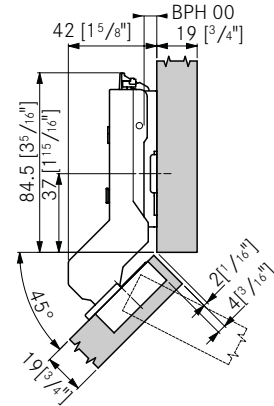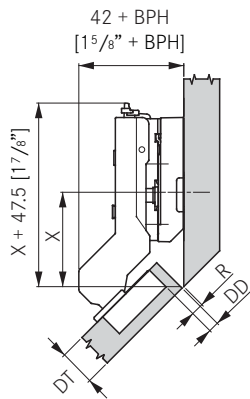

Drawing shows Tiomos with a base plate height (BPH) 12.

Drilling Distance (DD)		3	4	5	6	7
Door thickness (DT)	22.0					
	21.0					
	20.0					
	19.0	12				
	18.0		12			
	17.0			12		
	16.0				12	
	15.0					12
Base Plate Height (BPH)						

Drilling Distance (DD)		3	4	5	6	7
Door thickness (DT)	22.0					
	21.0					
	20.0					
	19.0	52.0				
	18.0		50.5			
	17.0			49.0		
	16.0				47.5	
	15.0					46.0
Wing Base Plate position (X)						



Reveal

Reveal dimensions were determined with an edge radius (of the door) of 1mm. Hinge dimensions and reveal calculation based on factory setting.

**IMPORTANT**

To determine the correct application Grass strongly recommends a trial mounting for all hinges and base plates.

Drilling Distance (DD)		3	4	5	6	7		
Door Thickness (DT)	24.0	2.4	2.1	2.1	2.1	2.0		
	22.0	1.6	1.6	1.6	1.5	1.5		
	21.0	1.4	1.3	1.3	1.3	1.3		
	20.0	1.1	1.1	1.1	1.1	1.1		
	19.0	0.9	0.9	0.9	0.9	0.9		
	18.0	0.7	0.7	0.7	0.7	0.7		
	17.0	0.6	0.6	0.6	0.6	0.6		
	16.0	0.6	0.6	0.6	0.6	0.6		
Reveal (R)								


Screw-on	Dowelled	Impresso	Cup dimensions

Tiomos 120/-15A


-15° angle corner cabinet hinge for overlay doors





- For -15° angle corner cabinets
- 120° opening angle
- 3-dimensional adjustment with suitable base plate
- Soft-close or Self-close hinges available
- Convenient depth adjustment with worm gear



Tiomos 120/-15A	Opening Angle 120°	Impresso	Screw-on	Dowelled
-----------------	--------------------	----------	----------	----------

Overlay		Pattern	Type	Item No.	Pattern	Type	Item No.	Item No.	PU	
	Hinge cup: steel, nickel-plated Hinge arm: zinc, nickel-plated	42 / 45	Soft-close	<b>F017139432223</b>	45	Soft-close	<b>F028138555223</b>	-	100	
			Self-close	<b>F034139403223</b>		Self-close	<b>F045138493223</b>	-	100	

Cover cap	Item No.	PU
 Steel, nickel-plated	F072135500247	1000


Hinge cup cover cap	Item No.	PU
 Steel, nickel-plated	F072135503228	150

Wood screw, nickel-plated	Item No.	PU
 #6 x 5/8" FHP, NI	81001-43	500

PU = packaging unit




## Overlay

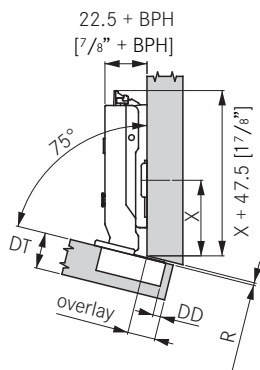

Drawing shows Tiomos with a base plate height (BPH) 0.


Door overlay	Drilling Distance (DD)					
	3	4	5	6	7	
	18.0				0	
	17.0			0		
	16.0		0			
	15.0	0				
	14.5			2	3	
	14.0	0			3.5	
	13.5		2	3		
	13.0			3.5		
	12.5	2	3			
	12.0		3.5			
	11.5	3			6	
	11.0	3.5				
	10.5	3			6	
	10.0	3.5				
	9.5		6			
	8.5	6				
Base Plate Height (BPH)						



Base plate height

	0	2	3	3.5	6
X	40	40.5	40.5	41	41.5

Wing base plate position (X)



Base plate height

	0	2	3	3.5	
X	23	23.5	23.5	24	

Straight base plate position (X)

## Reveal

Reveal dimensions were determined with an edge radius (of the door) of 1mm. Hinge dimensions and reveal calculation based on factory setting.

### IMPORTANT

To determine the correct application Grass strongly recommends a trial mounting for all hinges and base plates.

Door Thickness (DT)	Drilling Distance (DD)						Reveal (R)
	3	4	5	6	7		
	24.0	6.4	5.4	4.4	3.4	2.4	
	22.0	3.0	2.0	1.5	1.5	1.5	
	21.0	1.4	1.3	1.3	1.3	1.3	
	20.0	1.1	1.1	1.1	1.1	1.1	
	19.0	0.9	0.9	0.9	0.9	0.9	
	18.0	0.7	0.7	0.7	0.7	0.7	
	17.0	1.0	1.0	1.0	1.0	1.5	
	16.0	1.0	1.0	1.0	1.0	1.0	


Screw-on	Impresso	Cup dimensions
		<p>( ) Impresso</p>

Tiomos 120/-30A


-30° angle corner cabinet hinge for overlay doors





- For -30° angle corner cabinets
- 120° opening angle
- 3-dimensional adjustment with suitable base plate
- Soft-close or Self-close hinges available
- Convenient depth adjustment with worm gear



Tiomos 120/-30A	Opening Angle 120°	Impresso	Screw-on	Dowelled
-----------------	--------------------	----------	----------	----------

Overlay		Pattern	Type	Item No.	Pattern	Type	Item No.	Item No.	PU
	Hinge cup: steel, nickel-plated Hinge arm: zinc, nickel-plated	42 / 45	Soft-close	<b>F017139433</b> 223	45	Soft-close	<b>F028138556</b> 223	-	100
			Self-close	<b>F034139404</b> 223		Self-close	<b>F045138494</b> 223	-	100


Cover cap	Item No.	PU
 Steel, nickel-plated	F072135500247	1000

Hinge cup cover cap	Item No.	PU
 Steel, nickel-plated	F072135503228	150

Wood screw, nickel-plated	Item No.	PU
 #6 x 5/8" FHP, NI	81001-43	500


PU = packaging unit

## Overlay

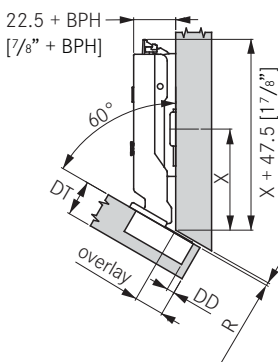


Drawing shows Tiomos with a base plate height (BPH) 02.

Door overlay	Drilling Distance (DD)				
	3	4	5	6	7
	19.0				0
	18.0			0	
	17.0		0		
	16.5				2
	16.0	0			
	15.5			2	
	15.0	0			3
	14.5		2		3.5
	14.0			3	
	13.5	2		3.5	
	13.0		3		
	12.5	2		3.5	
	12.0		3		6
	11.5		3.5		
	11.0	3			6
	10.5	3.5			
	10.0		6		
	9.0		6		
	8.0	6			
	Base Plate Height (BPH)				



Base plate height

	0	2	3	3.5	6
X	53.5	55	55.5	55.5	57
Wing base plate position (X)					



Base plate height

	0	2	3	3.5	
X	36.5	38	38.5	38.5	
Straight base plate position (X)					

## Reveal


Reveal dimensions were determined with an edge radius (of the door) of 1mm. Hinge dimensions and reveal calculation based on factory setting.

### IMPORTANT


To determine the correct application Grass strongly recommends a trial mounting for all hinges and base plates.

Door Thickness (DT)	Drilling Distance (DD)					Reveal (R)	
	3	4	5	6	7		
	24.0	6.4	5.4	4.4	3.4	2.4	
	22.0	3.0	2.0	1.5	1.5	1.5	
	21.0	1.4	1.3	1.3	1.3	1.3	
	20.0	1.1	1.1	1.1	1.1	1.1	
	19.0	0.9	0.9	0.9	0.9	0.9	
	18.0	0.7	0.7	0.7	0.7	0.7	
	17.0	1.0	1.0	1.0	1.0	1.5	
	16.0	1.0	1.0	1.0	1.0	1.0	
						Reveal (R)	


### Screw-on



### Impresso

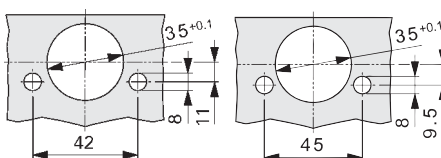

### Cup dimensions

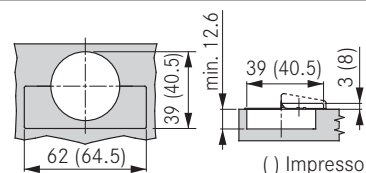


Tiomos 120/-45A


-45° angle corner cabinet hinge for overlay doors



- For -45° angle corner cabinets
- 120° opening angle
- 3-dimensional adjustment with suitable base plate
- Soft-close or Self-close hinges available
- Convenient depth adjustment with worm gear



									
Tiomos 120/-45A		Opening Angle 120°		Impresso		Screw-on		Dowelled	

Overlay		Pattern	Type	Item No.	Pattern	Type	Item No.	Item No.	PU
	Hinge cup: steel, nickel-plated Hinge arm: zinc, nickel-plated	42 / 45	Soft-close	<b>F017139434</b> 223	45	Soft-close	<b>F028138557</b> 223	-	100
			Self-close	<b>F034139405</b> 223		Self-close	<b>F045138495</b> 223	-	100


Cover cap	Item No.	PU
Steel, nickel-plated	F072135500247	1000

Hinge cup cover cap	Item No.	PU
Steel, nickel-plated	F072135503228	150

Wood screw, nickel-plated	Item No.	PU
#6 x 5/8" FHP, NI	81001-43	500


PU = packaging unit

## Overlay




Drawing shows Tiomos with a base plate height (BPH) 02.

Door overlay	Drilling Distance (DD)					
	3	4	5	6	7	
	12.0				0	
	11.5			0		
	10.5		0			
	9.5	0		2		
	8.5	0		2		
	8.0			3		
	7.5		2	3.5		
	7.0			3		
	6.5	2		3.5		
	6.0		3			
	5.5	2	3.5			
	5.0		3			
	4.5	3.5				
	4.0	3			6	
	3.5	3.5				
	3.0			6		
	2.0		6			
	1.0	6				
	0.0	6				
	Base Plate Height (BPH)					



Base plate height

	0	2	3	3.5	6
X	60.5	62.5	63.5	64	66.5
Wing base plate position (X)					



Base plate height

	0	2	3	3.5	
X	43.5	45.5	46.5	47	
Straight base plate position (X)					

## Reveal


Reveal dimensions were determined with an edge radius (of the door) of 1mm. Hinge dimensions and reveal calculation based on factory setting.

### IMPORTANT


To determine the correct application Grass strongly recommends a trial mounting for all hinges and base plates.

Door Thickness (DT)	Drilling Distance (DD)						Reveal (R)
	3	4	5	6	7		
	24.0	6.4	5.4	4.4	3.4	2.4	
	22.0	3.0	2.0	1.5	1.5	1.5	
	21.0	1.4	1.3	1.3	1.3	1.3	
	20.0	1.1	1.1	1.1	1.1	1.1	
	19.0	0.9	0.9	0.9	0.9	0.9	
	18.0	0.7	0.7	0.7	0.7	0.7	
	17.0	1.0	1.0	1.0	1.0	1.5	
	16.0	1.0	1.0	1.0	1.0	1.0	


## Screw-on



## Impresso

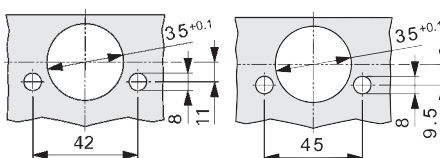

## Cup dimensions

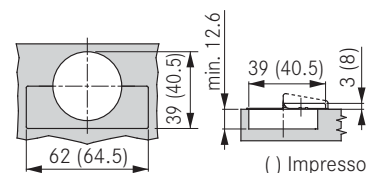


Tiomos PCC

Pie-cut corner cabinet hinge





- 3-dimensional adjustment with suitable base plate
- Designed for connecting two folding doors in corner cabinet
- For door thicknesses 16 to 24 mm
- Self-close hinges available
- Used in conjunction with Tiomos 160 hinges
- 35 mm full cup drill hole

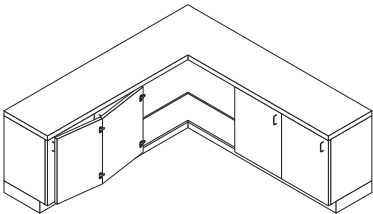

Tiomos PCC	Screw-on	Dowelled
------------	----------	----------

Overlay	Pattern	Type	Item No.	Item No.	PU
 <div>Hinge cup: steel, nickel-plated Hinge arm: zinc, nickel-plated</div>	42	Self-close	-	F045138336228	150
	45	Self-close	F045138517228	F045138518228	150


Cover cap	Item No.	PU
 Steel, nickel-plated	F072135500247	1000

Hinge cup cover cap	Item No.	PU
 Steel, nickel-plated	F072135503228	150


Wood screw, nickel-plated	Item No.	PU
 #6 x 5/8" FHP, NI	81001-43	500

PU = packaging unit


## Hinge Application




16mm door thickness with base plate height 0




19mm door thickness with base plate height 0





14mm door thickness with base plate height 0



15mm door thickness with base plate height 0

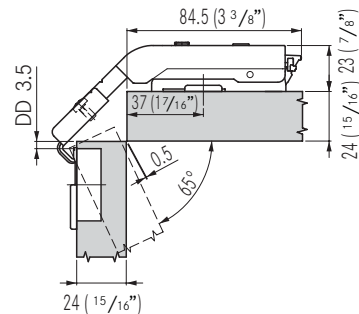

24mm door thickness with base plate height 0

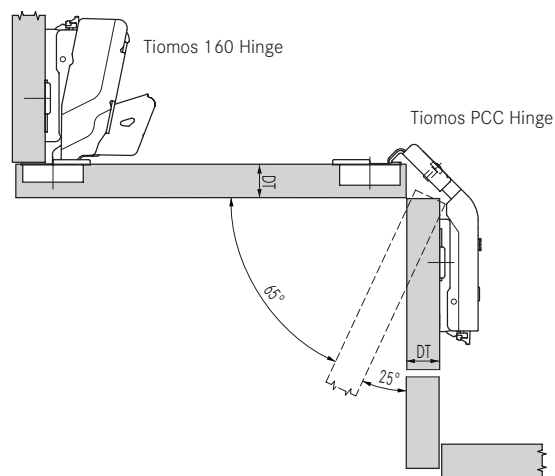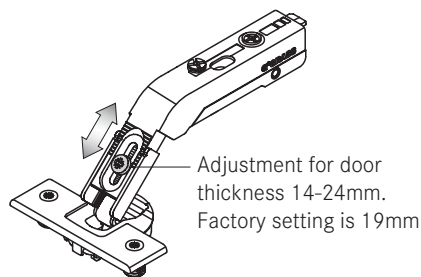

DD = Drilling Distance  
DT = Door Thickness


Screw-on	Dowelled	Cup dimensions




# Tiomos base plates

For Tiomos hinges


## Tiomos wing base plates




- Steel, nickel plated
- Depth adjustment via worm gear
- Height adjustment via worm gear or elongated hole
- Side adjustment via hinge
- Use a #2 Pozi drive screwdriver for hinge adjustment
- Attach base plates using all available screw holes



Height adjustment via base plate  
Via worm gear  $\pm 2$  mm  
Via elongated holes  $\pm 2.5$  mm





Side Adjustment  
 $\pm 2$  mm





Depth adjustment  
 $+3/-2$  mm



All adjustment options can be made independently of one another.

Wing base plate, 4 point fixing	37/32	For wood screws															
		<table><tr><th>Height</th><th>Item No.</th><th>PU</th></tr><tr><td>0</td><td><b>F058139746</b>228</td><td>150</td></tr><tr><td>2</td><td><b>F058139747</b>228</td><td>150</td></tr><tr><td>3</td><td><b>F058139748</b>228</td><td>150</td></tr><tr><td>3.5</td><td><b>F058139749</b>228</td><td>150</td></tr></table>	Height	Item No.	PU	0	<b>F058139746</b> 228	150	2	<b>F058139747</b> 228	150	3	<b>F058139748</b> 228	150	3.5	<b>F058139749</b> 228	150
Height	Item No.	PU															
0	<b>F058139746</b> 228	150															
2	<b>F058139747</b> 228	150															
3	<b>F058139748</b> 228	150															
3.5	<b>F058139749</b> 228	150															



- Height adjustment via worm gear

Wing base plate, 4 point fixing	37/32	For Euro screws															
		<table><tr><th>Height</th><th>Item No.</th><th>PU</th></tr><tr><td>0</td><td><b>F058139756</b>228</td><td>150</td></tr><tr><td>2</td><td><b>F058139757</b>228</td><td>150</td></tr><tr><td>3</td><td><b>F058139758</b>228</td><td>150</td></tr><tr><td>3.5</td><td><b>F058139759</b>228</td><td>150</td></tr></table>	Height	Item No.	PU	0	<b>F058139756</b> 228	150	2	<b>F058139757</b> 228	150	3	<b>F058139758</b> 228	150	3.5	<b>F058139759</b> 228	150
Height	Item No.	PU															
0	<b>F058139756</b> 228	150															
2	<b>F058139757</b> 228	150															
3	<b>F058139758</b> 228	150															
3.5	<b>F058139759</b> 228	150															

- Height adjustment via worm gear

Wing base plate, 4 point fixing	37/32	With pre-mounted Euro screws (13.5 mm)															
		<table><tr><th>Height</th><th>Item No.</th><th>PU</th></tr><tr><td>0</td><td><b>F058139761</b>228</td><td>150</td></tr><tr><td>2</td><td><b>F058139762</b>228</td><td>150</td></tr><tr><td>3</td><td><b>F058139763</b>228</td><td>150</td></tr><tr><td>3.5</td><td><b>F058139764</b>228</td><td>150</td></tr></table>	Height	Item No.	PU	0	<b>F058139761</b> 228	150	2	<b>F058139762</b> 228	150	3	<b>F058139763</b> 228	150	3.5	<b>F058139764</b> 228	150
Height	Item No.	PU															
0	<b>F058139761</b> 228	150															
2	<b>F058139762</b> 228	150															
3	<b>F058139763</b> 228	150															
3.5	<b>F058139764</b> 228	150															

- Height adjustment via worm gear

Wing base plate, 4 point fixing	37/32	With pre-mounted Euro screws (10 mm)															
		<table><tr><th>Height</th><th>Item No.</th><th>PU</th></tr><tr><td>0</td><td><b>F058139863</b>228</td><td>150</td></tr><tr><td>2</td><td><b>F058139864</b>228</td><td>150</td></tr><tr><td>3</td><td><b>F058139865</b>228</td><td>150</td></tr><tr><td>3.5</td><td><b>F058139866</b>228</td><td>150</td></tr></table>	Height	Item No.	PU	0	<b>F058139863</b> 228	150	2	<b>F058139864</b> 228	150	3	<b>F058139865</b> 228	150	3.5	<b>F058139866</b> 228	150
Height	Item No.	PU															
0	<b>F058139863</b> 228	150															
2	<b>F058139864</b> 228	150															
3	<b>F058139865</b> 228	150															
3.5	<b>F058139866</b> 228	150															


- Height adjustment via worm gear
- For twin application

PU = packaging unit


Wing steel base plate, 4 point fixing

37/32

Expanding dowels (5mm)



- Height adjustment via worm gear




Height	Item No.	PU
0	<b>F058139766</b> 228	150
2	<b>F058139767</b> 228	150
3	<b>F058139768</b> 228	150


Wing steel base plate, 3 point fixing

37/32

For wood screws



- Height adjustment via elongated screw holes




Height	Item No.	PU
0	<b>F058139721</b> 228	150
2	<b>F058139722</b> 228	150
3	<b>F058139723</b> 228	150
3.5	<b>F058139724</b> 228	150


Wing steel base plate, 3 point fixing

37/32

With pre-mounted euro screws (13.5 mm)



- Height adjustment via elongated screw holes




Height	Item No.	PU
0	<b>F058139736</b> 228	150
2	<b>F058139737</b> 228	150
3	<b>F058139738</b> 228	150
3.5	<b>F058139739</b> 228	150


Wing base plate, 2 point fixing

37/32

For wood screws



- Zinc die-cast/Steel, nickel plated
- Height adjustment via worm gear




Height(x)	Item No.	PU
6	<b>F058139892</b> 217	50
9.5	<b>F058139888</b> 217	50
12	<b>F058139893</b> 217	50
19	<b>F058139894</b> 217	50
21	<b>F058139895</b> 217	50


Wing base plate, 2 point fixing

37/32

With pre-mounted euro screws (13.5 mm)



- Zinc die-cast/Steel, nickel plated
- Height adjustment via worm gear




Height(x)	Item No.	PU
6	<b>F058139873</b> 217	50
9.5	<b>F058139882</b> 217	50
12	<b>F058139874</b> 217	50
19	<b>F058139875</b> 217	50
21	<b>F058139896</b> 217	50


PU = packaging unit

# Tiomos base plates


For Tiomos hinges




- Steel, nickel plated
- Height and depth adjustment via worm gear
- Side adjustment via hinge
- Use a #2 Pozi drive screwdriver for hinge adjustment
- Attach base plates using all available screw holes



Height adjustment via base plate  
Via worm gear  $\pm 2$  mm



Side Adjustment  
 $\pm 2$  mm




Depth adjustment  
 $+3/-2$  mm

All adjustment options can be made independently of one another.


Straight base plate, 2 point fixing

20/32

For wood screws



- Height adjustment via worm gear




Height	Item No.	PU
0	F059139701228	150
2	F059139702228	150
3	F059139703228	150


Straight base plate, 2 point fixing

20/32

With pre-mounted Euro screws



- Height adjustment via worm gear





Height	Item No.	PU
0	F059139711228	150
2	F059139712228	150
3	F059139713228	150

+5° Wedge for screw fixing

37/32

For wood screws

- Zinc, nickel plated
- For placing under wing mounting plates
- Can be stacked (max. 3)





Height	Item No.	PU
3	F072135757217	50

-5° Wedge for screw fixing

37/32

For wood screws


- Zinc, nickel plated
- For placing under wing mounting plates
- Cannot be stacked



Height	Item No.	PU
3	F072135758217	50

PU = packaging unit

Tiemos face frame adapter plates

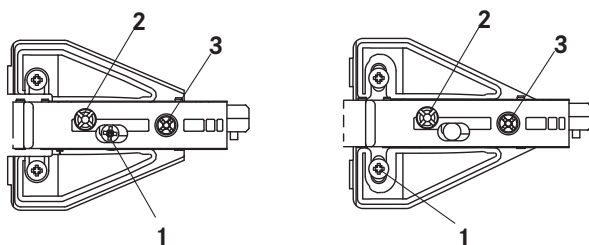

- Steel, nickel plated
- Depth adjustment via worm gear
- Height adjustment via worm gear or elongated hole
- Side adjustment via hinge
- Use a #2 Pozzi drive screwdriver for hinge adjustment
- Attach base plates using all available screw holes

Height adjustment via base plate  
Via worm gear  $\pm 2$  mm  
Via elongated holes  $\pm 2.5$  mm

Side Adjustment  
 $\pm 2$  mm


Depth adjustment  
 $+3/-2$  mm

All adjustment options can be made independently of one another.


FFA base plate, 2 point fixing

9.5/32

For wood screws



- Height adjustment via elongated screw holes




Height	Item No.	PU
1.5	<b>F058139821228</b>	150
3.5	<b>F058139822228</b>	150
4.5	<b>F058139823228</b>	150
5	<b>F058139824228</b>	150


FFA base plate, 2 point fixing

9.5/32

For wood screws



- Height adjustment via worm gear




Height	Item No.	PU
1.5	<b>F058139825228</b>	150
3.5	<b>F058139826228</b>	150
4.5	<b>F058139827228</b>	150
5	<b>F058139828228</b>	150


FFAL base plate with flange, 4 point fixing

9.5/32

For wood screws



- Height adjustment via elongated screw holes




Height	Item No.	PU
3.5	<b>F058139829228</b>	150
5	<b>F058139830228</b>	150

Inset FFA base plate, 3 point fixing

10/32

For wood screws





- Steel, diecast, nickel plated
- Height adjustment via worm gear
- Note: Requires a 9.5 crank hinge (half-overlay)


Drilling Distance (DD)

	3	4	5	6
28.0	4.0			
26.0	4.0	3.0		
24.0	4.0	3.0	2.0	
22.0	4.0	3.0	2.0	
20.0	4.0	3.0	2.0	1.0
19.0	4.0	3.0	2.0	1.0
18.0	4.0	3.0	2.0	1.0
16.0	4.0	3.0	2.0	1.0

Door Thickness (DT)  
Reveal (R)



Height	Item No.	PU
0	<b>F058139831228</b>	150



PU = packaging unit

# Tipmatic

## For handle-free wooden doors




- Gently tapping the front causes the doors to open to a convenient angle
- Any free-swing hinges can be used
- Large magnet catch range – closes doors reliably
- Gap adjustment from 2.5 to 5.5 mm with integrated, self-locking and toolless depth adjustment feature
- Mount on the front side of the cabinet or with an adapter plate

### Tipmatic pin

### For drilling



- Incl. Tipmatic mechanism (hole edge cover 1 mm)
- Stick on strike plate
- Screw on strike plate
- Hole drilled from the front
- Plastic RAL 7036, platinum grey




Item No.	PU
68873-06	25

### Line Boring Adapter plate

### For Euro screws



- Suitable for line boring 28 and 37 mm
- Attach with Euro screws (6.3 x 13.5)
- Plastic RAL 7035, light grey




Item No.	PU
63310-40	25

### Standard adapter plate

### For wood screws



- Quick upgrade installation
- Attach with wood screws (3.5 x 13)
- Plastic RAL 7035, light grey




Item No.	PU
63311-40	25

### Linear adapter plate

### For wood screws



- Design solution – also suitable for insets
- Attach with wood screws (3.5 x 13)
- Plastic RAL 7035, light grey




Item No.	PU
63309-40	25


PU = packaging unit

## Mounting for full and half overlay wooden doors

### Mounting on front side

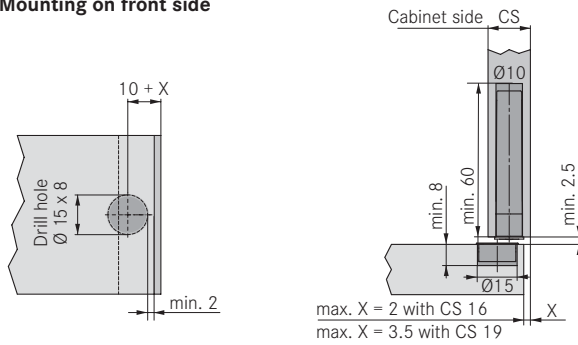


### Mounting with adapter plates

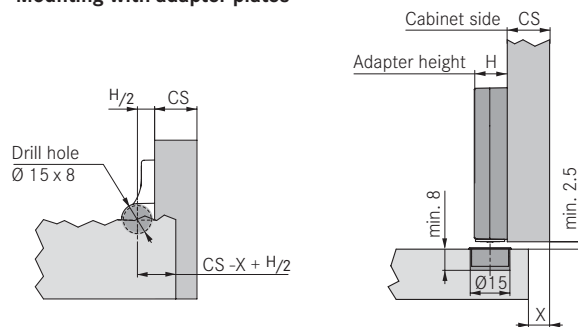

## Mounting for inset wooden doors


### Mounting with linear adapter plate

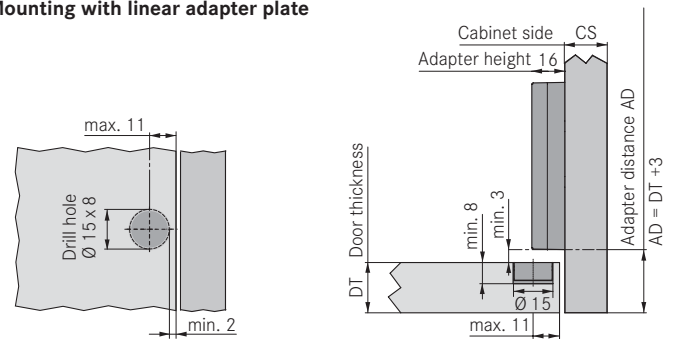


# Tiemos Accessories

## Angle reduction clips

### Opening angle reduction clip to 85°




Steel, nickel




Works for all Tiemos 110° and 120° standard hinges. Reduces the opening angle to 85° to prevent doors from bumping fronts or walls in corner installations.

Item No.	PU
<b>F072135751517</b>	50

### Opening angle reduction clip to 120°



Black plastic

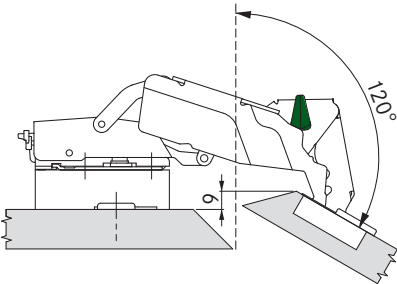

Works for all Tiemos 160° standard hinges. Reduces the opening angle to 120° to prevent doors from bumping the cabinet side in inset and mitered corner applications.



Item No.	PU
<b>F072135753117</b>	50

## Hinge clip protector

Prevents accidental release of the hinge from the base plate. For use in lockers, wardrobes, office furniture or similar applications.

Item No.	PU
<b>F072135807540</b>	500

Steel, nickel

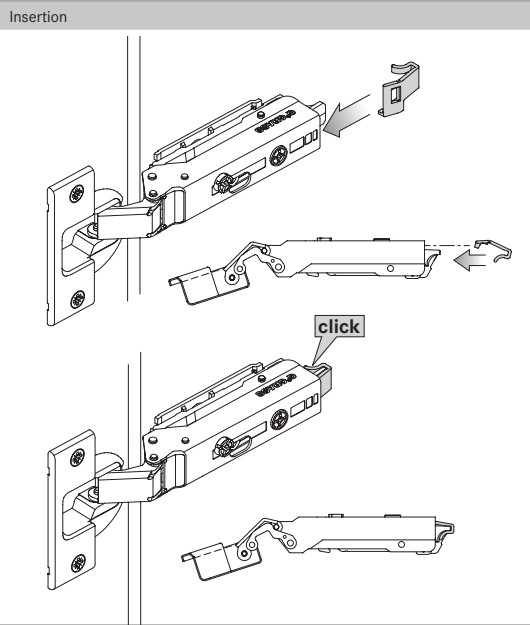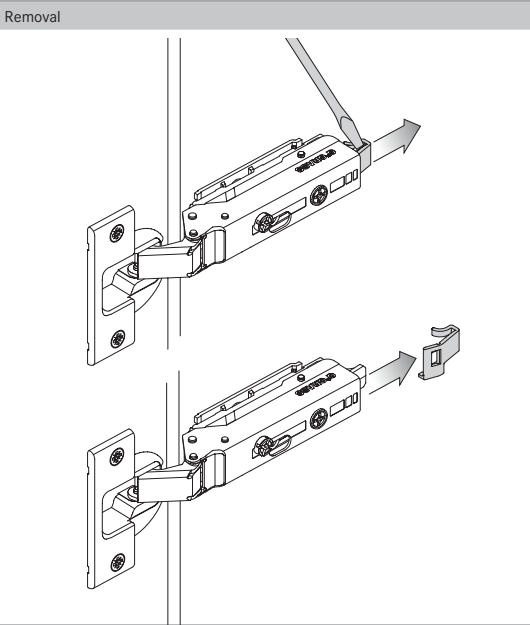Insertion	Removal
	


PU = packaging unit



## Cover caps

### Hinge arm cover cap

For all crankings




Item No.	PU
<b>F072135500247</b>	1000

Steel, nickel plated, without imprint\*

### Hinge arm cover cap, long

For 00 and 03 Cranking only




Item No.	PU
<b>F072135504247</b>	1000

Steel, nickel plated, without imprint\*

\* Imprinting available upon special request

### Hinge cup cover cap




Item No.	PU
<b>F072135503228</b>	150

Steel, nickel plated


## Screws

### Euro screw, nickel-plated



Description	Item No.	PU
13mm Euro Screw (1/2")	81015-43	500
18mm Euro Screw (11/16")	83000-43	500
7.5mm Euro Screw (5/16")	83001-43	500

### Wood screw, nickel-plated



Description	Item No.	PU
#6 x 1/2" FHP, NI	81014-43	500
#6 x 7/16" FHP, NI	81016-43	500
#6 x 5/8" FHP, NI	81001-43	500
#6 x 3/4" FHP, NI	81003-43	500
#6 x 1" FHP, NI	81004-43	500

## Pozidrive screwdriver

#2 Pozidrive screwdriver for hinges




Description	Item No.	PU
Pozidrive screwdriver	98000-01	1
Pozidrive screwdriver	98000-08	50

PU = packaging unit

# GRASS PRO1

## Drilling and insertion machine for 45mm boring pattern

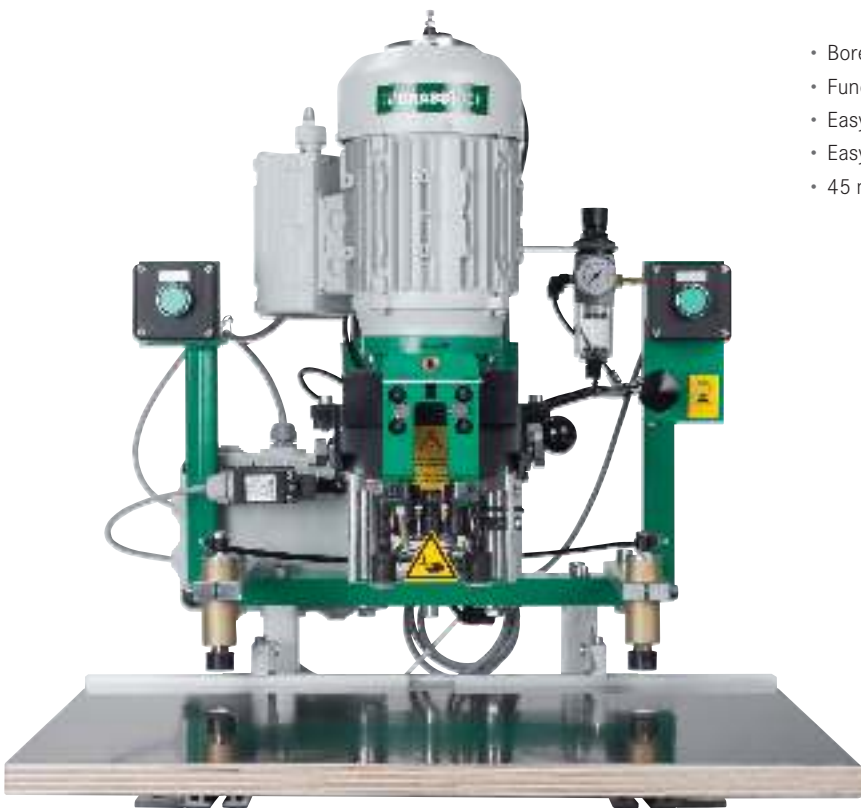


- Bore depth automatically adjusts to material thickness
- Functional design
- Easy, fast and efficient operation
- Easy maintenance
- 45 mm boring pattern

Motor configuration	Item No.	PU
220v single phase pneumatic	94559-01	1
220v three phase pneumatic	94560-01	1


### Adjustable hold-down devices

Adjustable hold-down devices are suitable for a wide range of material thicknesses. Holds door firmly in place for drilling and insertion and features manual release.

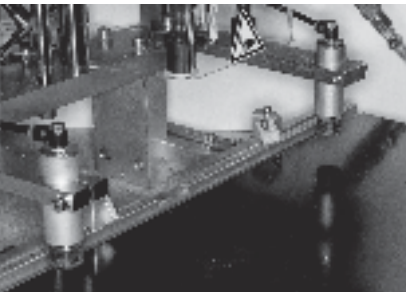


### Pneumatic controls

Two-hand start button controls for safe drilling and insertion functions.



### Quick change chucks

Easy drill bit removal and insertion using quick change chucks.



PU = packaging unit

Carbide drill bits for GRASSPRO 1



Diameter	Direction	Item no.	PU
35 mm	RH	00077-01	1
8 mm	LH	00160-01	1



Bit set for hinge drilling	Item no.	PU
1 x 35 mm/RH, 2 x 8 mm/LH	00213-01	1



Additional stops for GRASSPRO 1



Description	Item no.	PU
Additional fence stop	949.200.21.0000	1
Universal fence stop	949.200.21.0100	1

Insertion dies for GRASSPRO 1



Description	Item no.	PU
Tiomos 110°/120°	<b>F146101310</b> 201	1
Universal Die for Tiomos 110°/120°/160°	<b>F146101308</b> 201	1
Nexis 110°/125°	04216-01	1
Nexis 170°	04218-01	1
TEC Die for all cup styles	92617	1

Extension fence 400mm to 1650mm



Description	Item no.	PU
Extension fence 400mm to 1650 mm	88612-01	1


PU = packaging unit


Assembly Hardware


Shelf Supports





Description	Item No.	PU
Plastic, clear, with steel pin	499.582.50.0050	5000
Metal spoon, nickel plated	499.582.50.2050	2000
Shelf support 7006/9.5, nickel	517.206.64.1015	2500
Shelf support 7035, nickel	517.206.61.0015	2500
H-802 plastic, square, clear	00036-43	500

Bumper Pads			
AIRSOFT Bumper Pads, plastic, round			
	Description	Item No.	PU
	AirsSoft Bumper pad, 2.5mm, clear	63480-99	480
	AirsSoft Bumper pad, 2.5mm, clear	63482-30	5000
	AirsSoft Bumper pad, 5mm, clear	63481-43	500
	AirsSoft Bumper pad, 5mm, clear	63483-30	5000


Self-adhesive Bumper Pads			
	Description	Item No.	PU
	Self-adhesive bumper pad, clear, 7mm	630.000.03.0750	1088
	Self-adhesive bumper pad, clear, 10mm	630.000.03.1050	1050
	Self-adhesive bumper pad, clear, 12mm	630.000.02.1250	5000

Bumper Pads			
	Description	Item No.	PU
	Bumper pad, round, clear, 3mm	31002-43	500
	Bumper pad, round, clear, 1.5mm	31004-43	500

Bumper Pads			
	Description	Item No.	PU
	Bumper pad, hexagonal, butterscotch, 3mm	00464-43	500

Cover Caps			
	Description	Item No.	PU
	35mm cover cap, white	22227-42	100
	35mm cover cap, almond	22228-42	100
	35mm cover cap, brown	22229-42	100

Door Stop



Description	Item No.	PU
H-950 door stop, clear	00068-43	500

PU = packaging unit

# GRASS GPS Calculator

For Tiomos



## Download the Calculator

- Download the GRASS GPS at [www.grassusa.com/gps](http://www.grassusa.com/gps)
- Unzip the file
- Select Hinge Finder
- Select Calculate
- Enter info and Calculate!

## Introducing the Tiomos Hinge Calculator!


### The Tiomos GPS takes the guess work out of choosing hinges

Determine which Tiomos hinge works best for your application. Choose the hinge type and enter the door specifications. The Tiomos Calculator will help you determine the best selection of hinge and base plate that should be used for your cabinet type and overlay selection. The calculator also provides the product number for ordering.

### Intuitive Interface

Fill in answers for nine simple questions and the GPS will simply calculate and provide appropriate information for your application.

The Tiomos Calculator provides you with hinge and base plate options, part descriptions, item numbers and adjustment instructions.

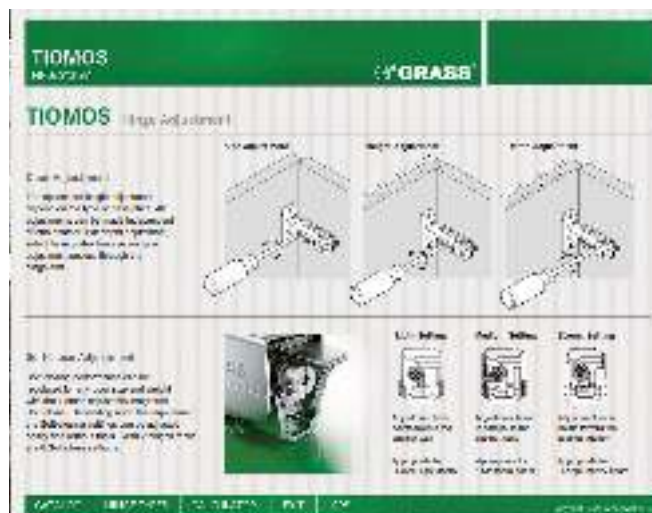



GRASS America Inc.  
1202 NC Highway 66 South  
Kernersville, NC 27284

Phone: 1-800-334-3512  
Fax: 1-800-525-8406

**Website:** [www.grassusa.com](http://www.grassusa.com)  
**E-mail:** [info@grassusa.com](mailto:info@grassusa.com)

GRASS Canada Inc.  
10 Newgale Gate, Unit 7  
Toronto, ON M1X 1C5

Phone 1-800-461-4975  
Fax 1-416-335-5907

**Internet:** [www.grasscanada.com](http://www.grasscanada.com)  
**E-Mail:** [info@grasscanada.com](mailto:info@grasscanada.com)



[www.grassusa.com](http://www.grassusa.com)